



上海赛十星智能科技有限公司


📍 上海市嘉定区外冈镇宝钱公路4900号2栋2楼

☎ 400-809-1230

✉ hd001@si-sing.com

💻 www.sisinsing.com

请联系我们代理商

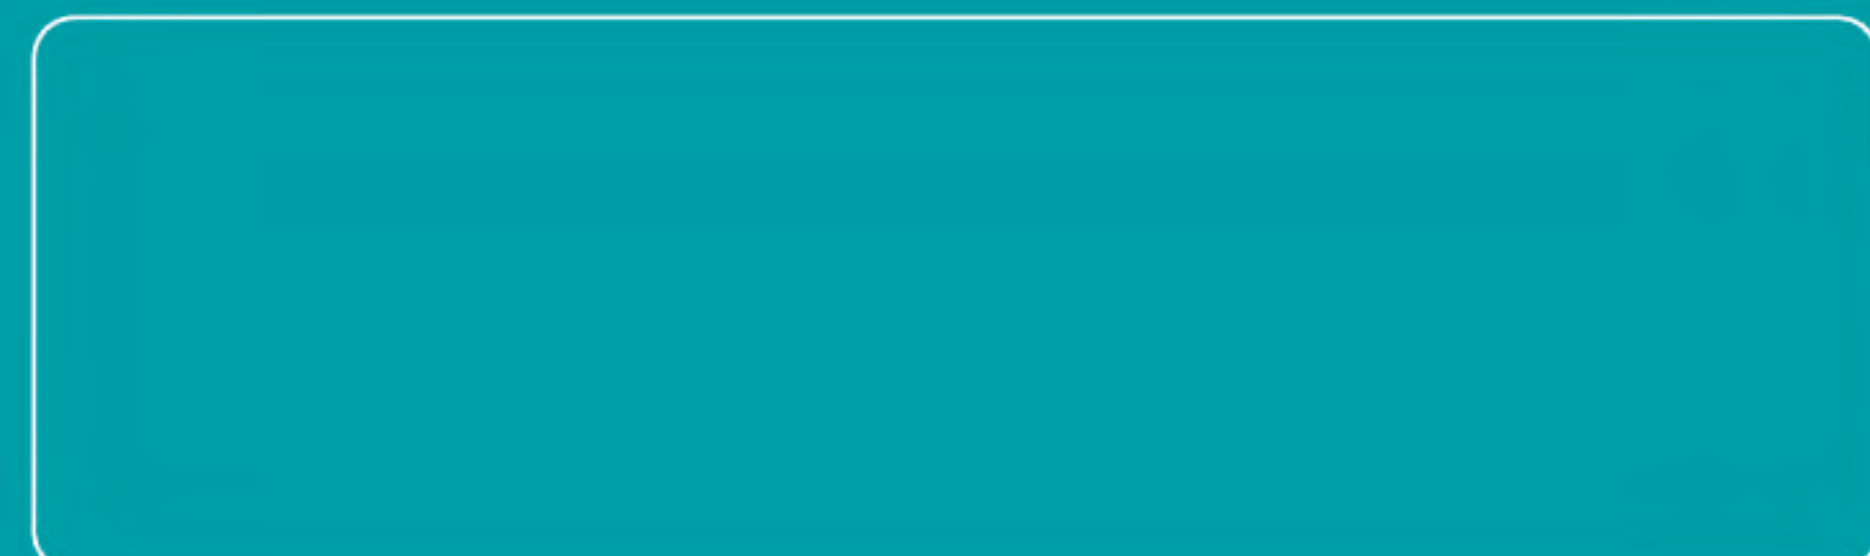

# EUROPEAN ELECTRIC CHAIN HOIST

🌐 [www.sisinsing.com](http://www.sisinsing.com)



## 欧式电动环链葫芦

欧式葫芦行业标杆







## Multi-product + Advanced Technology + System Solution

SISINSING sets high quality products and advanced technology in one, in addition to the lifting industry experts and experience A wealth of engineers; It also offers a wide range of products and safe and reliable system solutions.And to best serve our customers.

## 多元产品+先进技术+系统方案

SISINSING集高质产品与先进技术于一体，除了拥有起重行业专家和丰富的工程师；还提供丰富多元的产品和安全可靠的系统解决方案，并以最佳方式服务于我们的客户。



# Higher Performance & Faster

## 更高性能 / 更快速度

- ◆ 欧式电动环链葫芦具有高性能、高安全性可靠性的优点，采用人性化设计理念，增加生产量，使工作达到最高效率。
- ◆ European electric chain hoist with high performance, high safety reliability advantages, Using use humanized design concept to increase your productivity and make the work to achieve the highest efficiency

# Sensitive and Fast

## 灵敏快捷

- ◆ 欧式电动环链葫芦动作灵活，定位精准。主起升速度快速有效，低速起升确保载荷平稳，精确定位。
- ◆ European electric chain hoist with flexible action, positioning accuracy. Lord stood upquickly and efficiently speed, low speed hoisting load smoothly, accurate positioning.


# Longer service life for greater efficiency

## 工作效率高/使用寿命更长

- ◆ 在实际工作中，SISINSING工作级别要比普通的2m工作级别多出20%，这意味着能够延长使用寿命，减少大修次数，这也是欧式电动环链葫芦所独有的特征。
- ◆ In practical terms, SISINSING european electric chain service life is extended by approx.20% in comparison with the conventional 2m classification for chain hoists FEM rating. This results in significantly prolonged timebetween service intervals and general overhauls. This extra operating life is only offered by european electric chain.




Longer service life for greater efficiency  
满载情况下的工作寿命

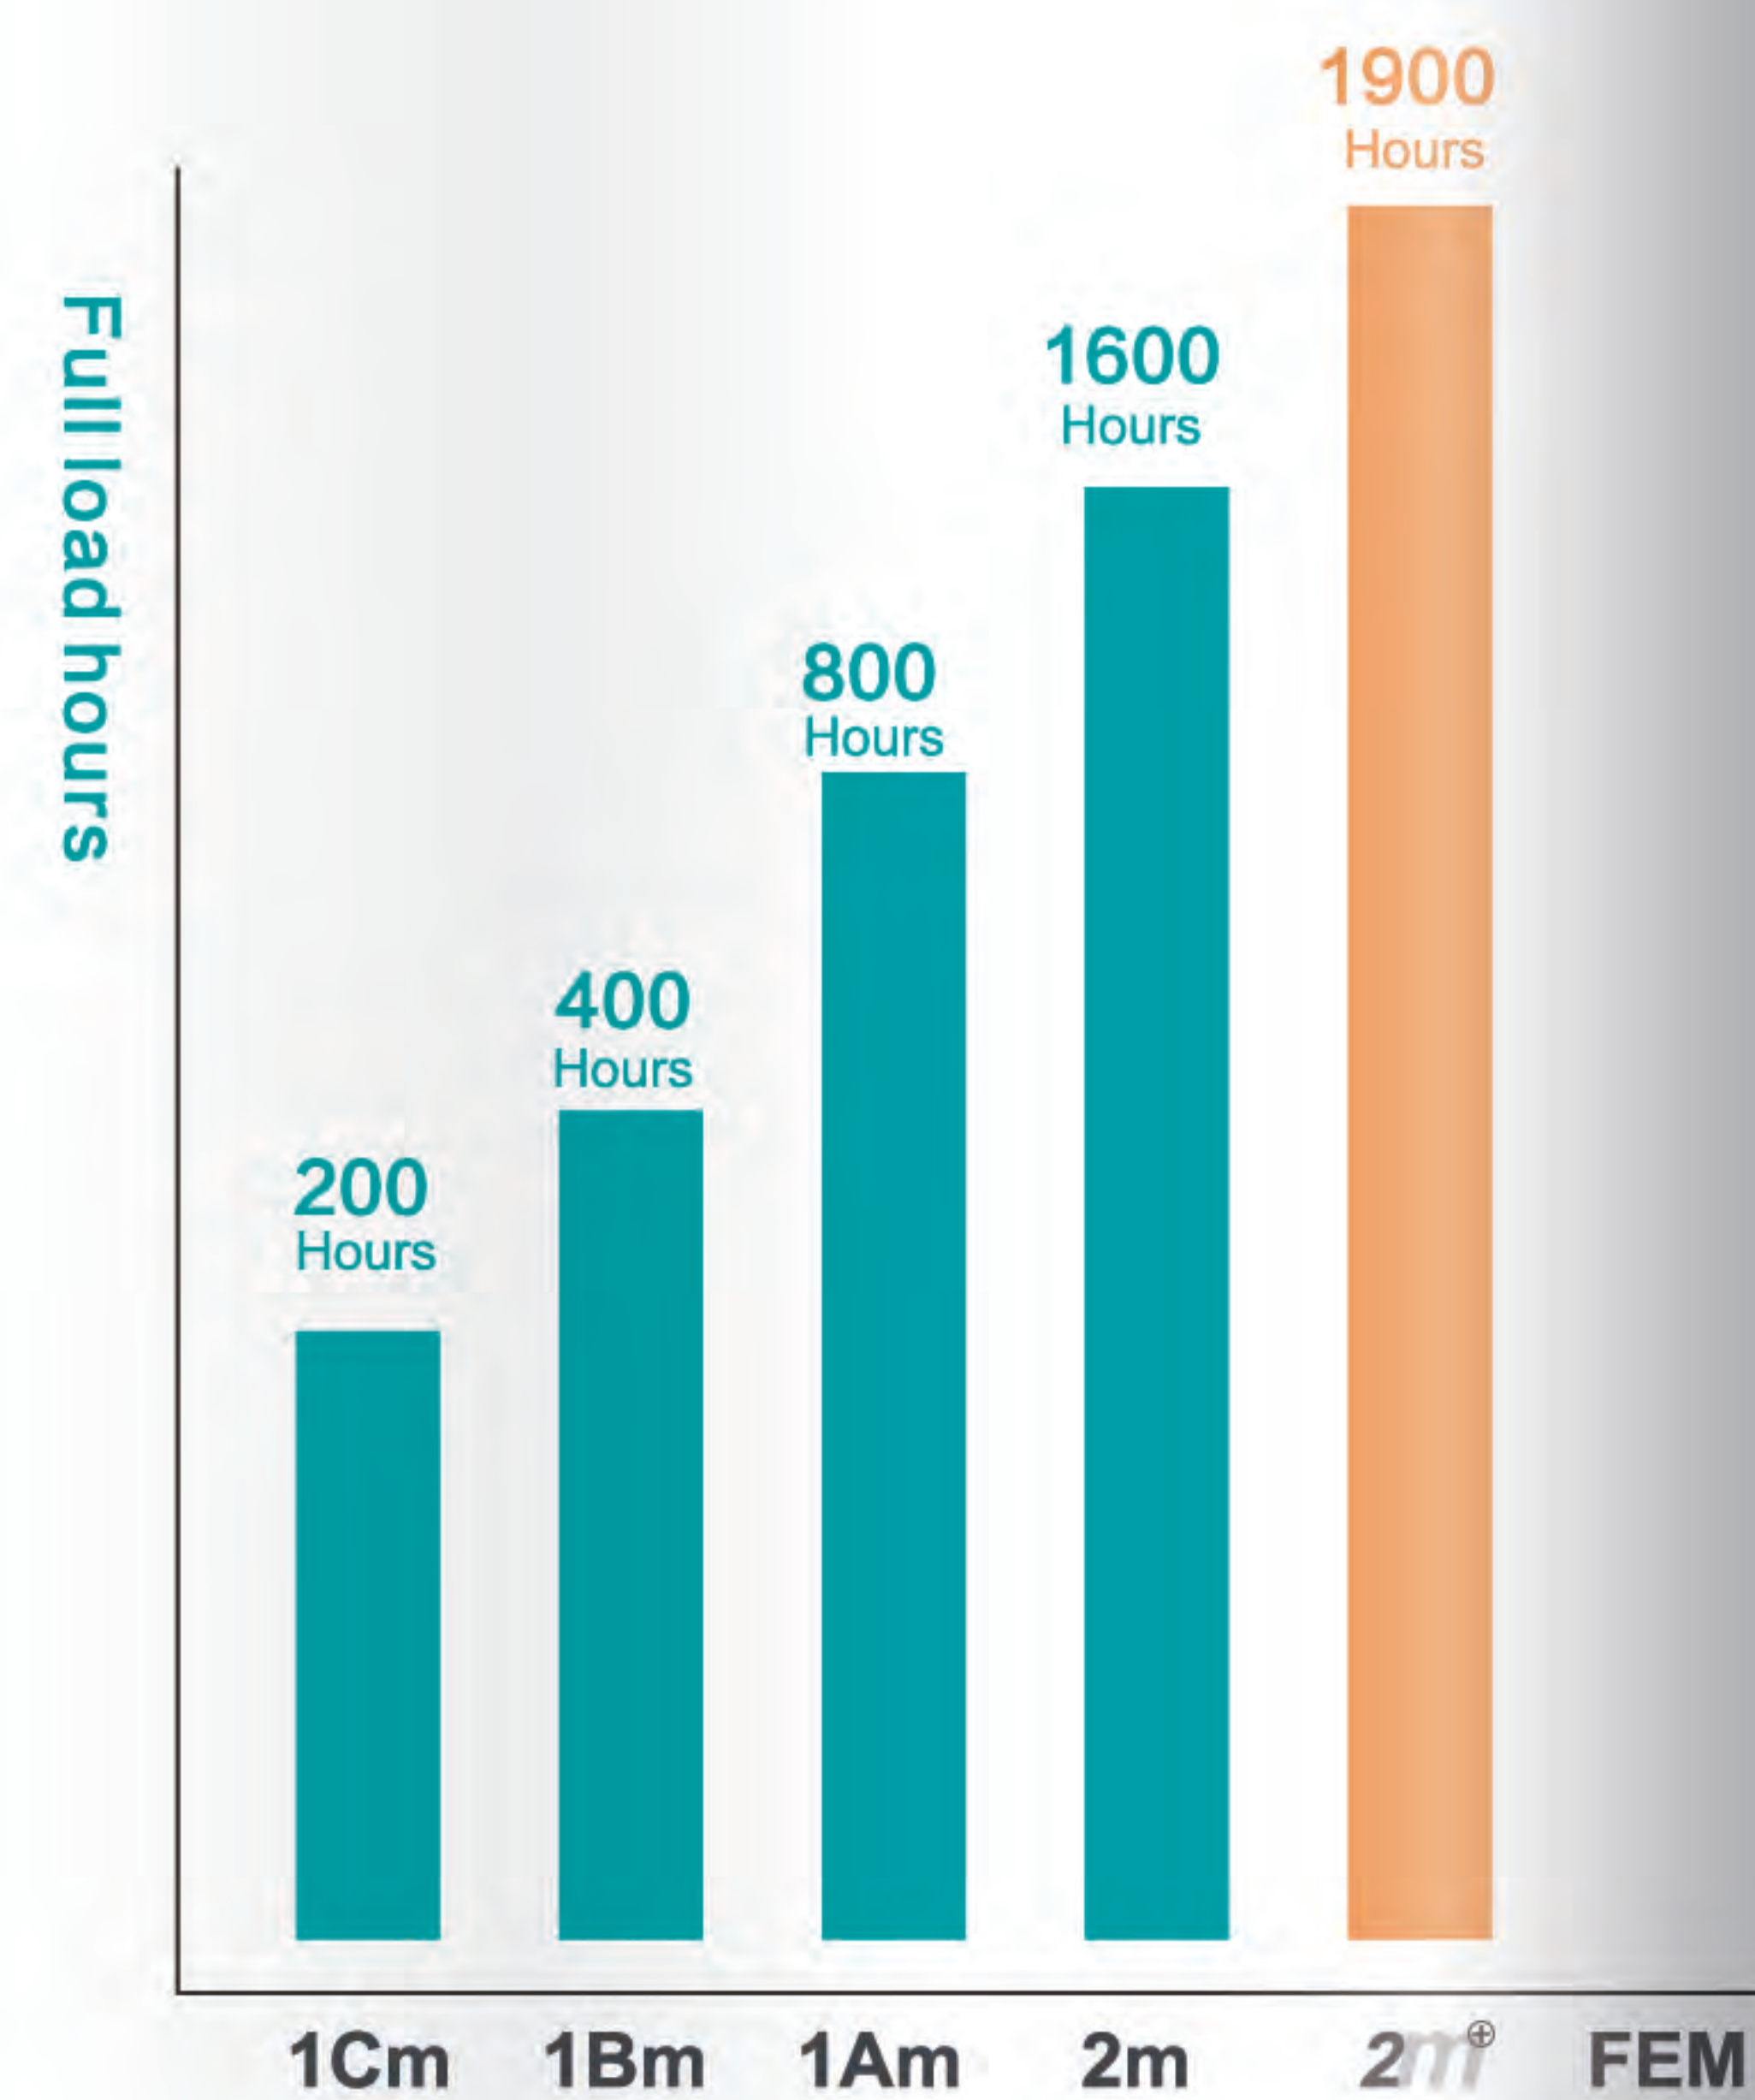

- ◆ Professional chain guide design  
专业的链轮设计
- ◆ More smooth and efficient operation  
运行更平稳高效
- ◆ Chain wear less  
链条磨损更小

# Maintenance: Fast And Simple

## 维护快速简单

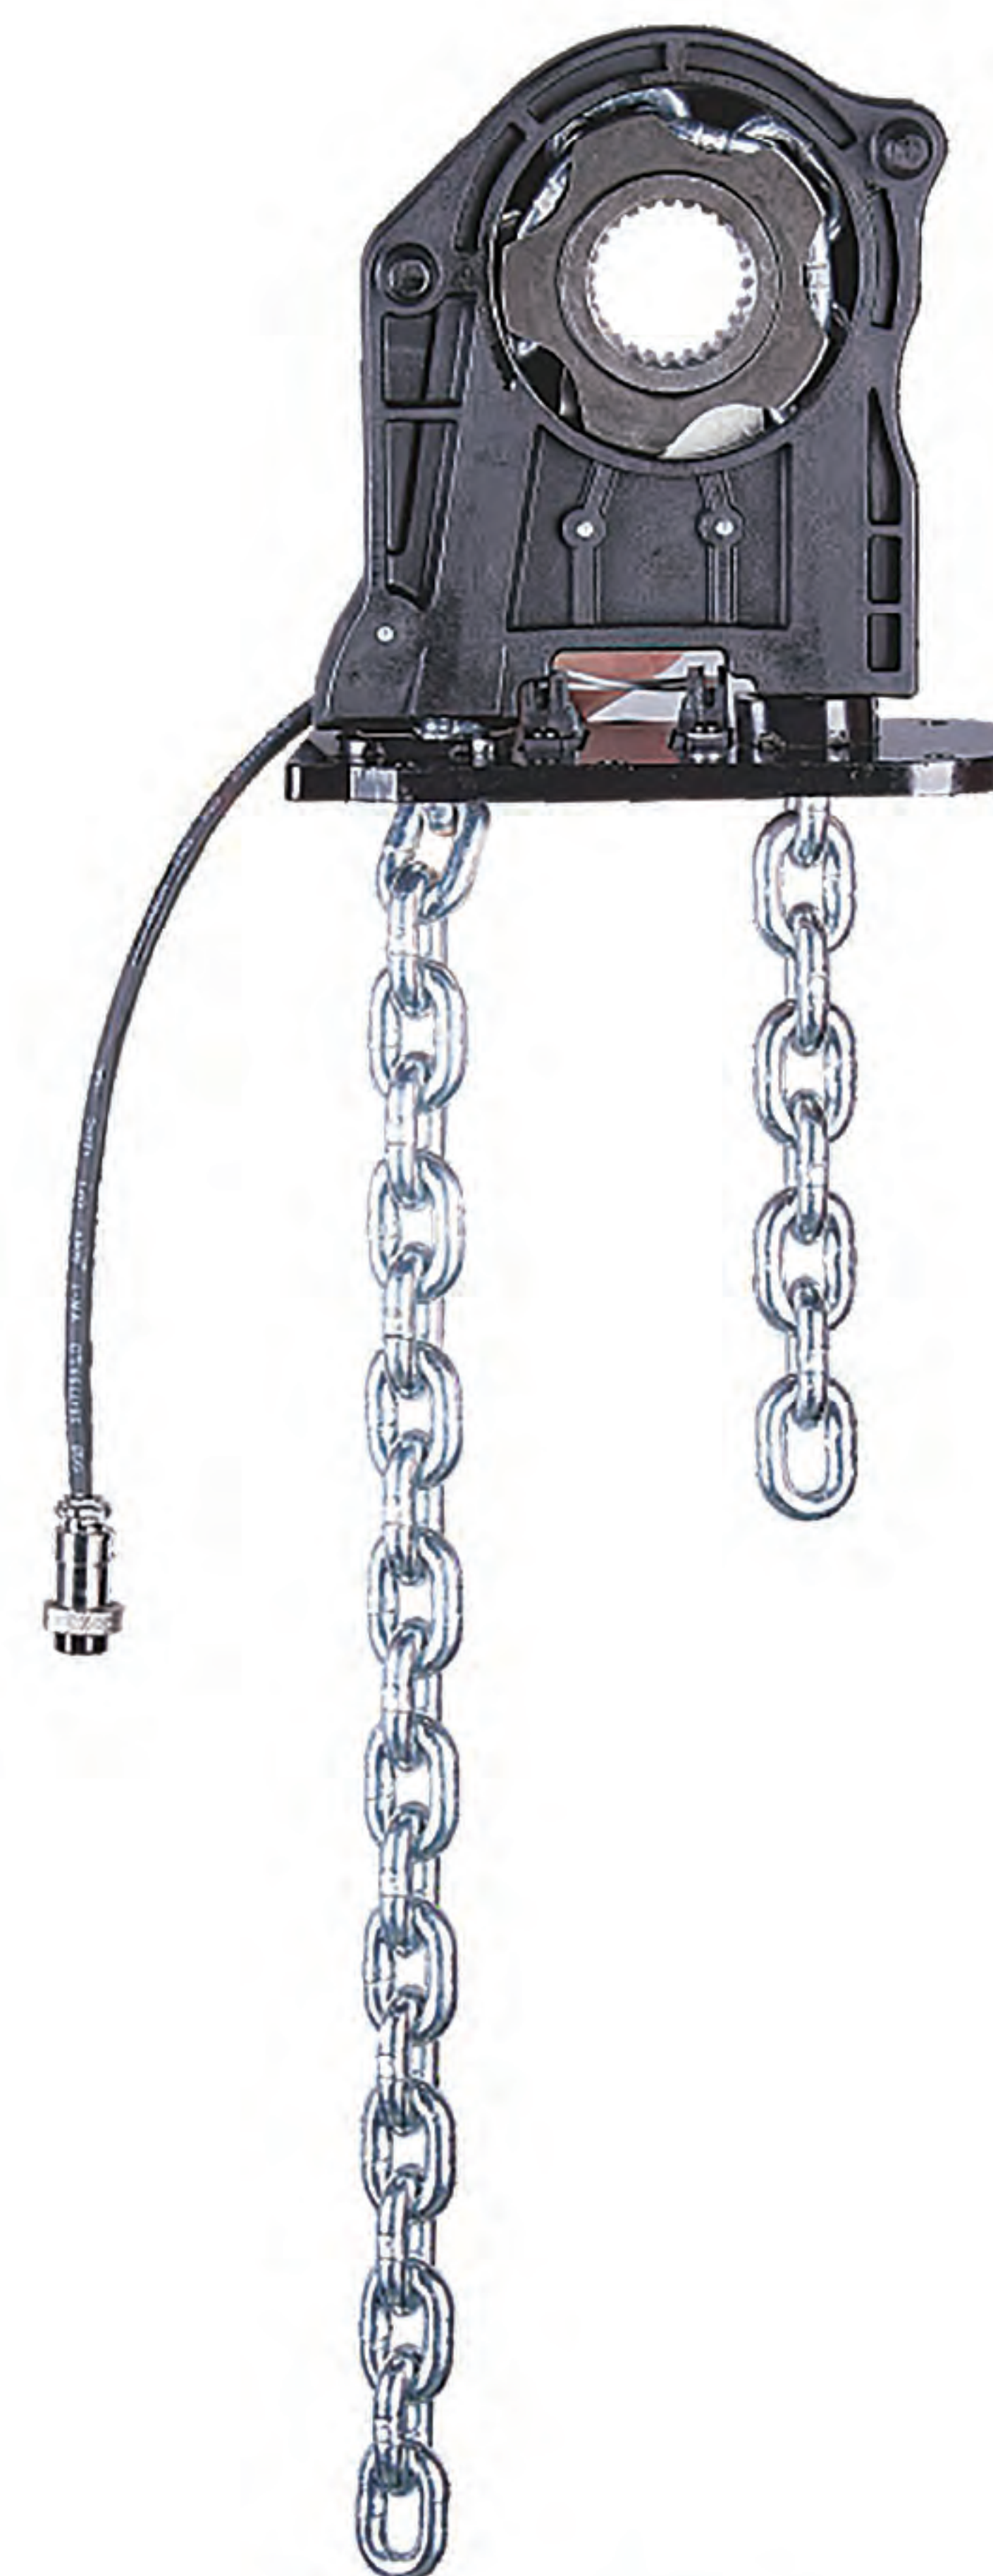


▲ Chain Guide

- ◆ SISINSING 欧式电动环链葫芦的所有主要驱动部件如齿轮箱，制动器和离合器等均采用特殊工艺制造，坚固耐用。SISINSING 系列制动器5年免维护。SISINSING 起重的产品出众的质量令其即使在繁忙工作下依然有很长的工作寿命。
- ◆ SISINSING european electric chain hoist, all main drive components, such as gear box, brake and clutch made by a special process, and durable, SISINSING series brake have 5 years free maintenance, SISINSING hoist still has a long working life with high quality even in busy work.
- ◆ 由于SISINSING 欧式电动环链葫芦良好的服务设计，少量必要的维护工作能够迅速简单地完成。
- ◆ Because SISINSING european electric chain is designed by excelent service idea and necessary maintenance work.can quickly & simply finished works.
- ◆ SISINSING 欧式电动环链葫芦的链轮设计紧凑、即插即用，更换快速方便，并且无需拆卸电机或齿轮箱部件。维护工作所造成的长时间停机已经成为过去。
- ◆ The chain drive of SISINSING european electric chain is designed as a compact unit which is slid into place and can be replaced in a minimum of time without the need todissassemble motor or gearbox parts.Long downtimes as a result of maintenance work are now a thing of the past.



# Tailored Solutions

量身定制的解决方案

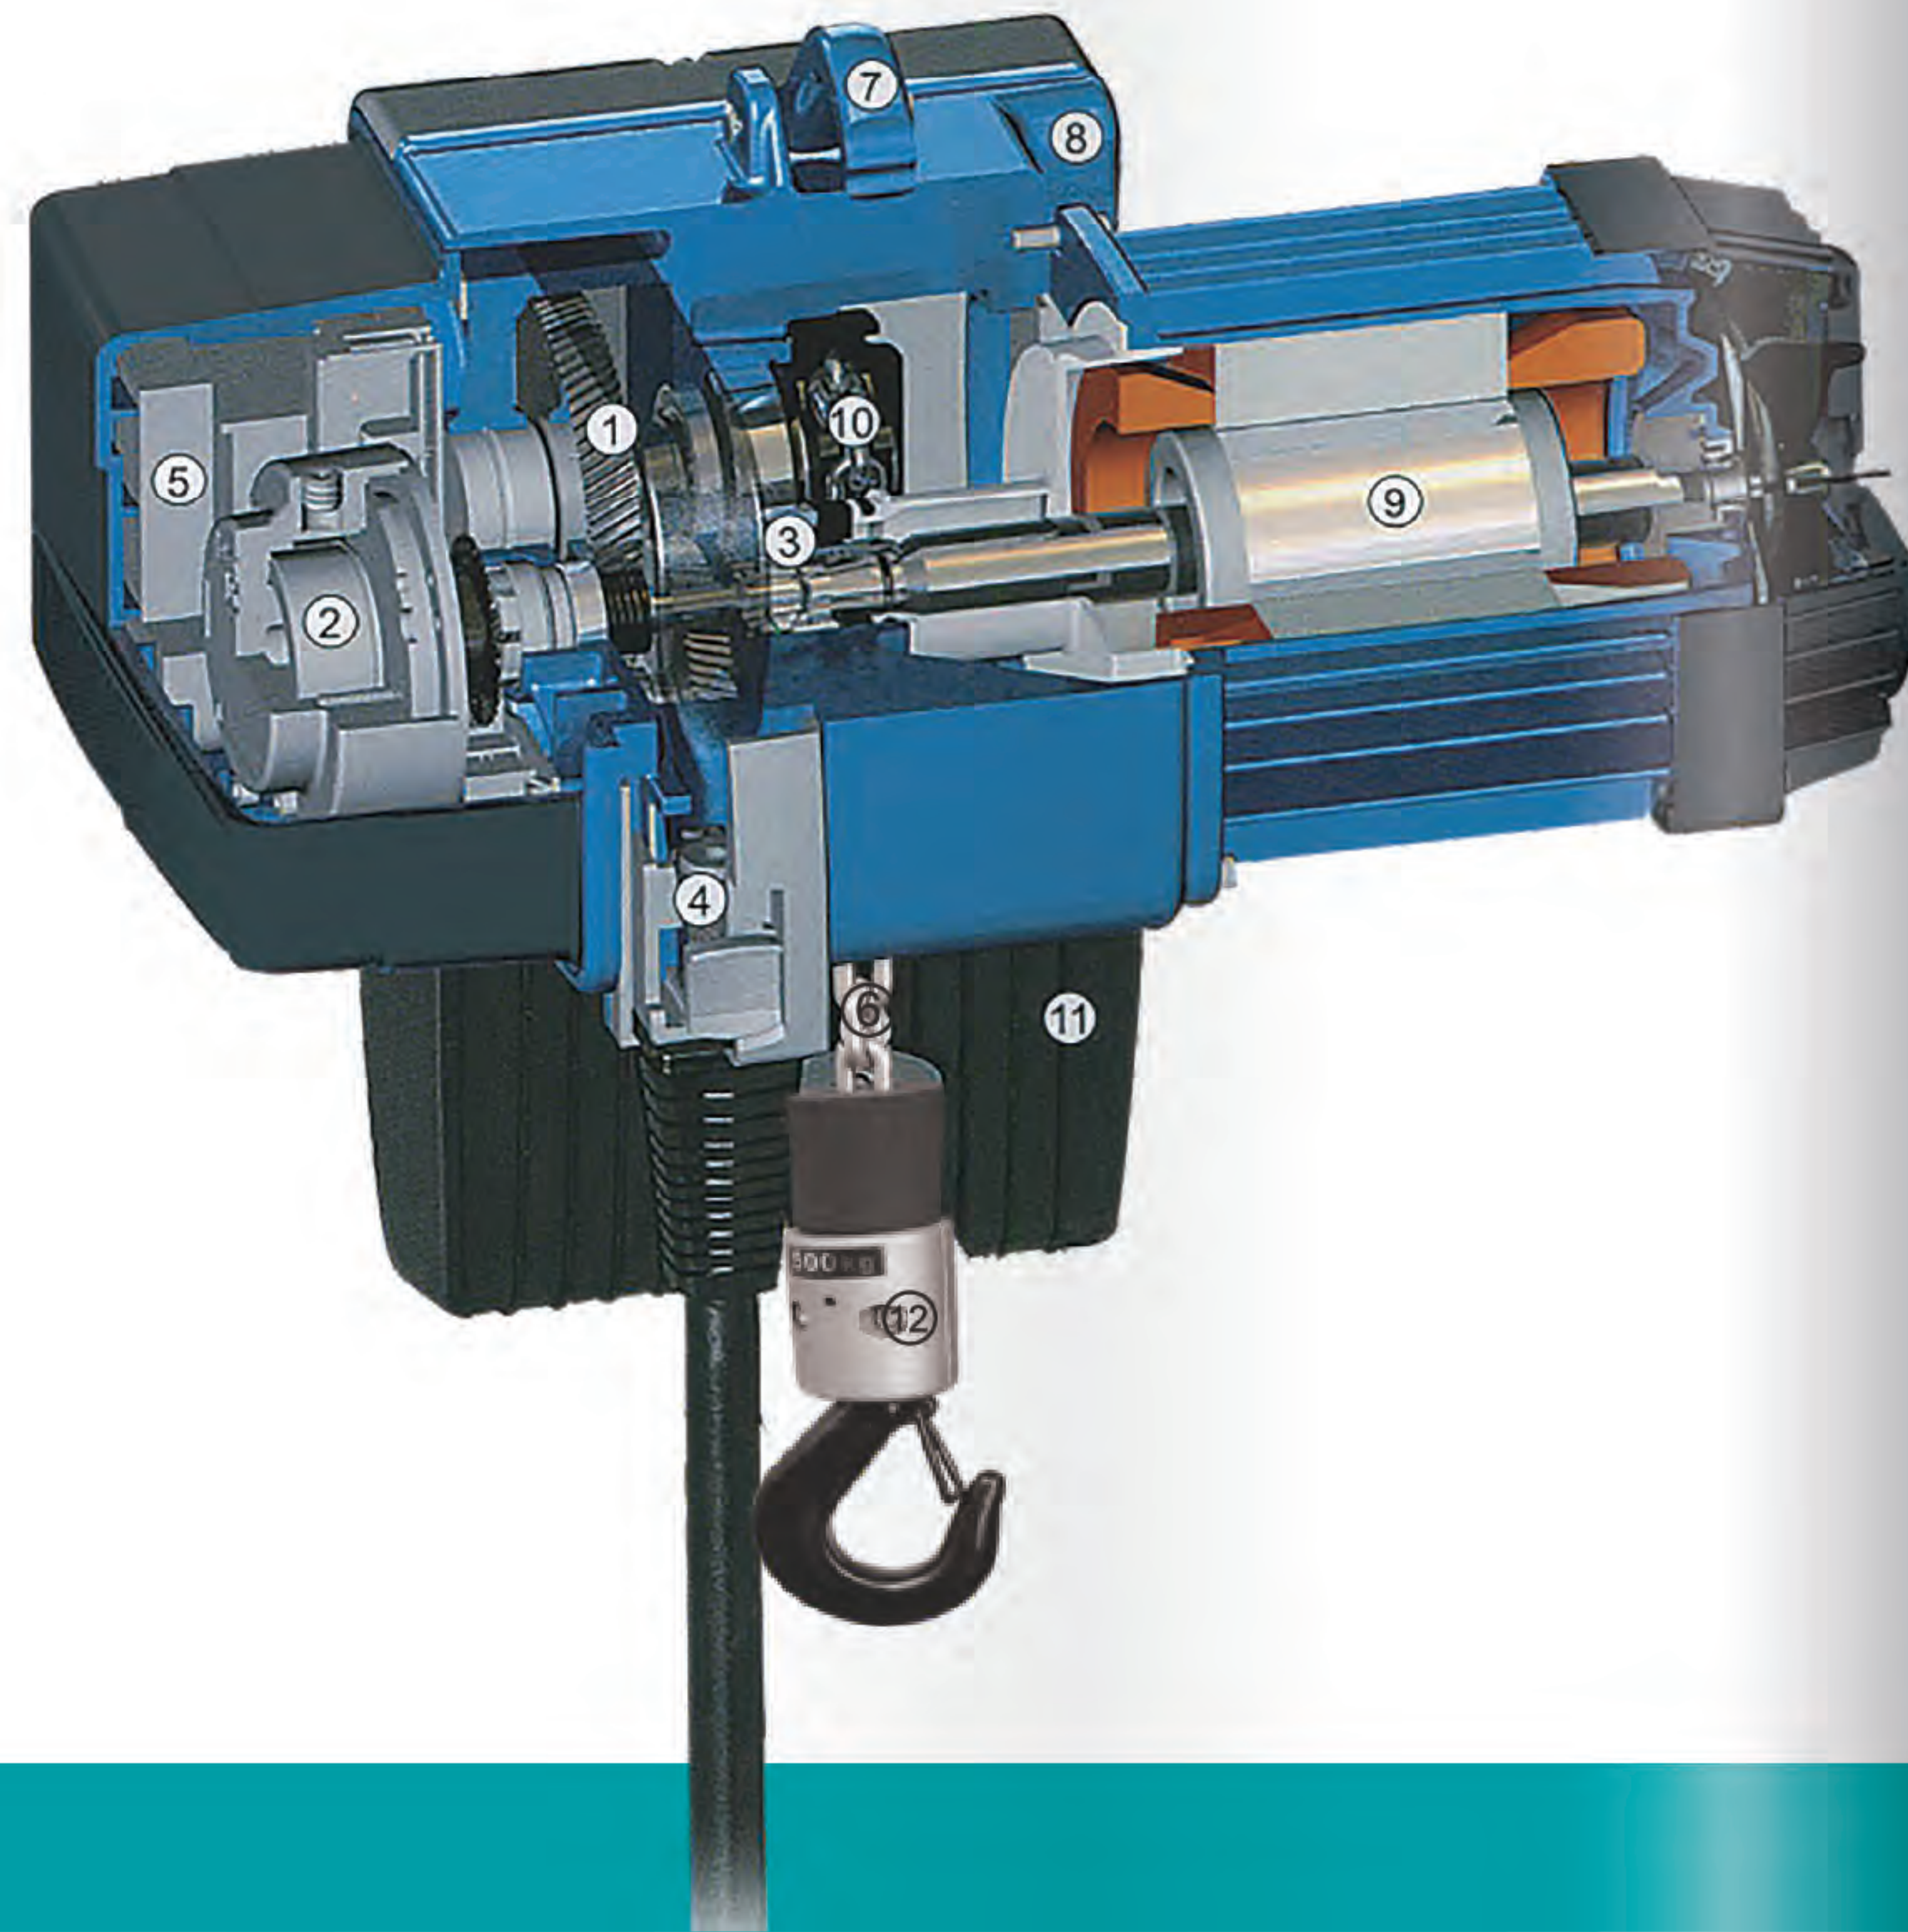

◆ 欧式电动环链葫芦通过相关权威认证葫芦电机、环链电动葫芦以及行走电机装置的防护等级为IP55，手电门防护等级为IP65外壳，可以防潮防尘。

◆ European electric chain hoist has been certified by the relevant national authority. Protection class of hoist motor, electric chain hoist and traveling motor device are all IP55, push button control is with excellent moistureproof dustproof, IP65.

1

**齿轮箱**——免维护，工作级别为M6，欧式电动环链葫芦满载运行的时间长达1900小时，此为SISINSING的标准额定使用时间，这意味着在实际应用中SISINSING要多出约20%的工作寿命。齿轮箱的斜齿轮传动降低工作噪音，运行更稳定。

**Gearbox**---Maintenance-free working-level for M6. European electric chain with a rated service life of 1990 full load hours. In practical terms, this means the service life is extended by approx. 20%. The helical gearing inside the gearbox also reduces operating noise and provides smooth operation.

2

**制动器**——免维护，由于磨损小，无需调节；制动快速平稳。制动器外壳采用双重密封，可在恶劣气候或工作环境下工作。

**Brake**---Maintenance-free because of minimum wear, adjustment is not necessary. The brake is enclosed in the electrical panel and provides double protection from the elements.

3


**摩擦离合器**——免维护。摩擦离合器集成在制动器的后端，能有效起到过载保护作用。内部具有速度检测器，非正常情况下可有效保障葫芦链条绝不会下滑。

**Slip clutch**---Maintenance-free. Integrated behind the brake in the power drive, it provides reliable protection against overload. Integrated slip clutch monitoring prevents permanent damage to the slip clutch.

4

**手电门的高度调节**——在吊钩行程2—5m和5—8m的范围内，控制电缆长度和手电门悬挂高度可无限变化。多余的控制电缆可被容纳在统一维修区。


**Height adjustable control pendant cable**---The length of the control cable. Therefore, the suspension height of the control pendant can be infinitely varied for a hook path range of 2-5m and 5-8m. The excess control cable is accommodated behind the service cover.

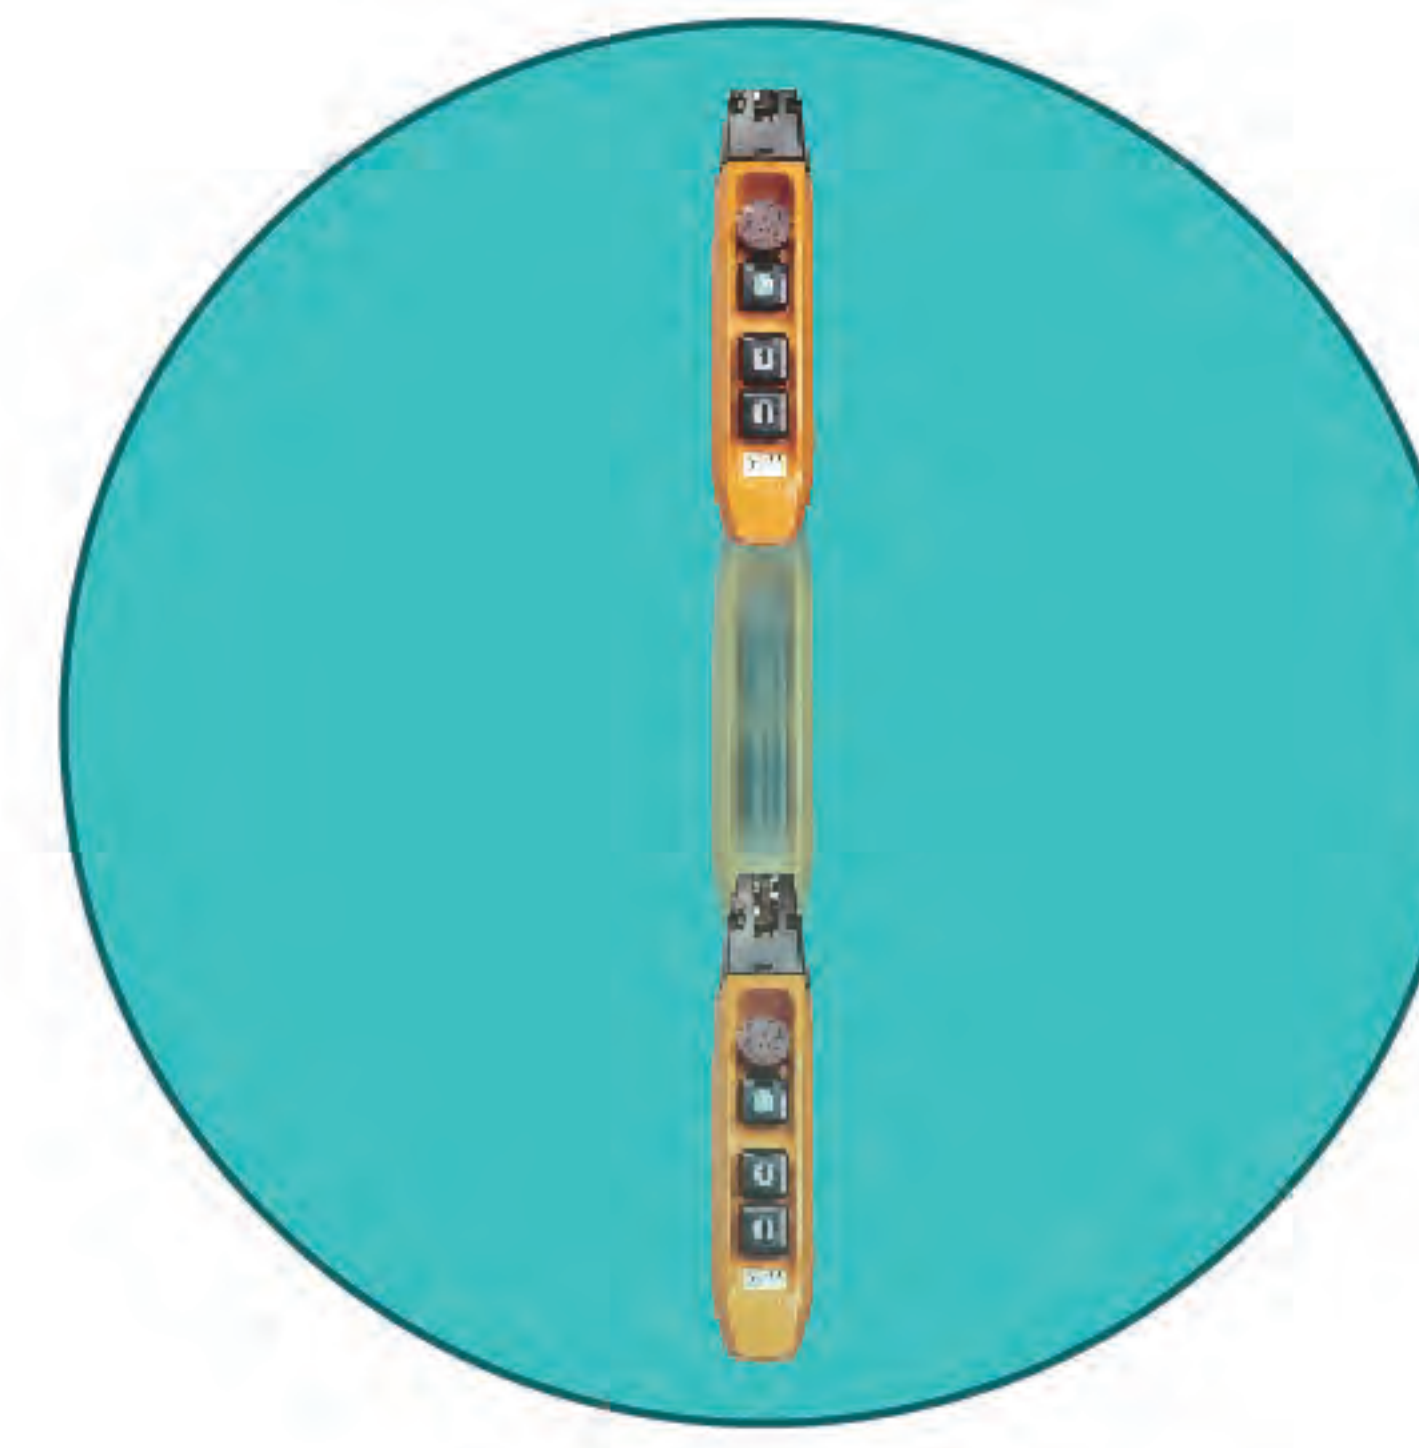

5

**控制方式**——24V低压控制方式，上下限位开关。

**Control**---24V contactor control, operating limit switches (upper/lower).

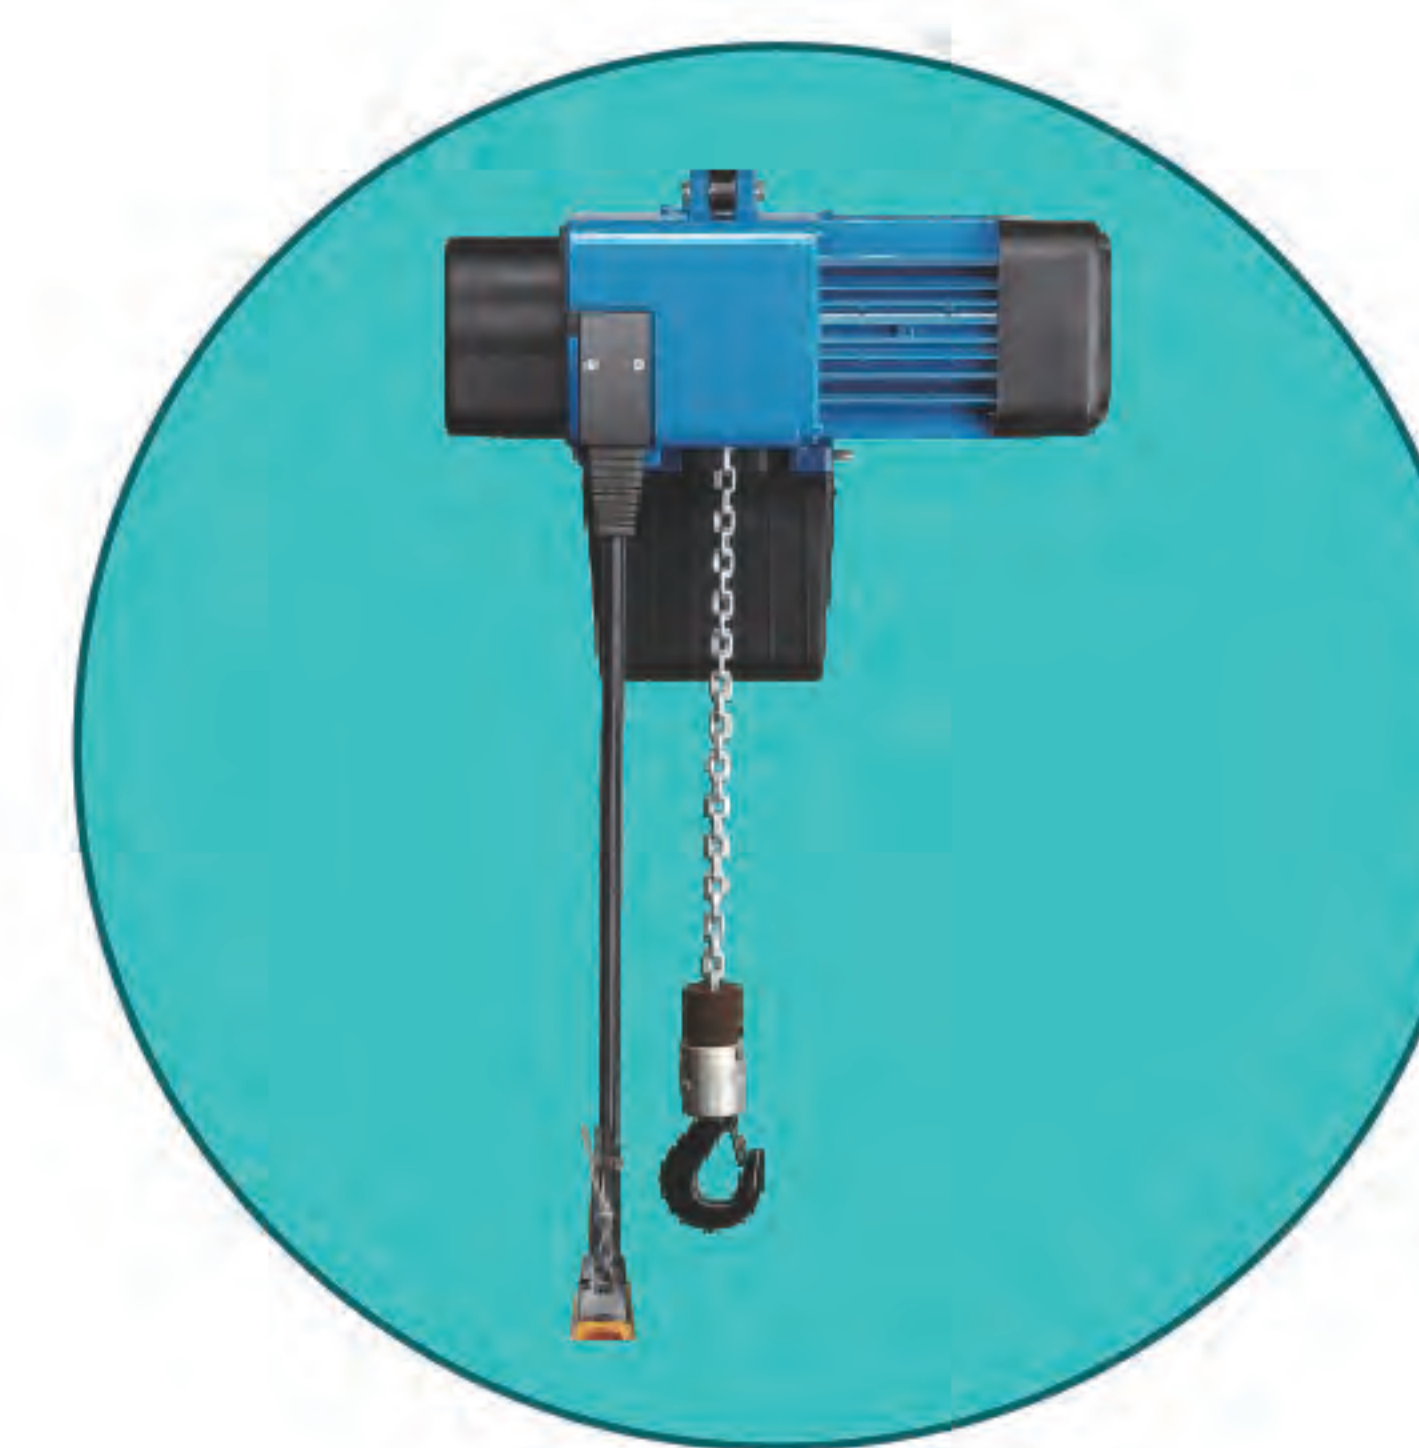

9

**葫芦电机**——坚固持久的高性能电机，即使在高温和长期运行中，也具有大的安全储备。采用两级起升速度，另有变频控制，提供多速度变化。

**Hoist motor**---High-performance motor with large safety reserves even at high ambient temperatures and in prolonged operation. Using 2 hoist speed with 1:4 speed ratio and frequency control to multi-speed requirements.

6

**链条**——高强度、抗老化的SISINSING专用链条，表面经过硬化处理。镀锌和额外的表面处理保护其不受恶劣环境的侵蚀。

**Steel chain**---A special SISINSING chain of high-strength. Hardened and galvanized material. Galvanized and other surface treatments are available to protect against specific hostile environments.

10

**链轮**——插入式连接便于快速更换整个链轮而无需拆卸电机或齿轮部件，从而大大减少了停机时间。采用高度耐磨的材料，使用寿命长。

**Chain guide**---The unit is a complete assembly consisting of the chain and chain guide which facilitates quick and easy replacement of the entire chain drive without having to remove the motor or gear parts. Downtime can therefore be reduced significantly. The chain drive consists of highly wear-resistant materials for long service life.

7

**悬挂装置**——SISINSING欧式电动环链葫芦采用紧凑的C型结构尺寸，可充分利用高度空间。SISINSING欧式电动环链葫芦配有多款悬挂装置，使其连接更为完美。

**Suspension bracket**---SISINSING hoists are supplied with short and long suspension brackets as standard and can always be attached to the super-structure with the optimal connection.

11

**集链盒**——采用坚固、有韧性并且耐冲击的特殊塑料；可放置长度8米的链条，也可提供可放置链条长达40米或120米的集链盒。

**Chain collector box**---Suspended from a pivoting connection, is made of tough, flexible and particularly impact-resistant plastic; capacity for up to 8m hook path. A flexible chain container for chain lengths up to 40m as well as special lengths up to 120m.

8

**外壳**——坚固，重量轻的压铸铝外壳，紧凑、现代化的工业设计。汽车级油漆，提供保护更长久。

**Housing**---Robust and lightweight die-cast aluminium housing of compact and modern industrial design. Automotive paint to provide more long-term protection.

12

**吊钩组**——吊钩装置手握舒适，符合人体工程学原理。吊钩经锻造加工，强度绝佳，吊钩360度旋转，特殊设计的安全舌片，确保操作安全。

**Bottom block**---Comfortable hook device by hand. For improved ergonomic handling of the hook. The hook after forging processing to make great strength, hooks rotate by 360 degrees, a specially designed safety tongue, to ensure safe operation.



EUROPEAN ELECTRIC CHAIN HOIST WITH HOOK TYPE

欧式电动环链葫芦（固定式）



基本特征

欧式电动环链葫芦可方便的安装到 KBK标准组件的轨道上。

Basic characteristics

European electric chain hoist can be installed to the KBK orbit of standard components

测试简单

所有电器连接均为插入式——即插即用通用型悬挂机构，既能用于KBK标准轨道又可与小车快速链接。

Easy test

All electrical connection to plug in, plug and play universal suspension mechanism,both can used for KBK standard track and can be connected to trolley quickly

人性化设计

控制电缆长度可以调节，手电门总在最合适的位置。手电门人性化设计，握感舒适，免除操作疲劳。

Humanized design

Control cable length can be adjusted,control pendant always in the most appropriate location. Control pendant is humanized design,grip feels comfortable,avoid operation fatigue

统一维修检测后盖

可用于电器接插，手电门高度调节，链条润滑。无需拆卸其他部件，快速更换起重链轮，减少停机时间。


Unified maintenance test back cover

Can be used for electric plug,Control pendant can be high adjusted, the chain lubrication,without having to remove other components, fastly replace chain guide,and reduce downtime

标准双速电机，工作效率更高  
低压24V控制更安全。

Standard double speed motor,higher working efficiency  
24V control voldage is more safe

Technical Parameters  
技术参数

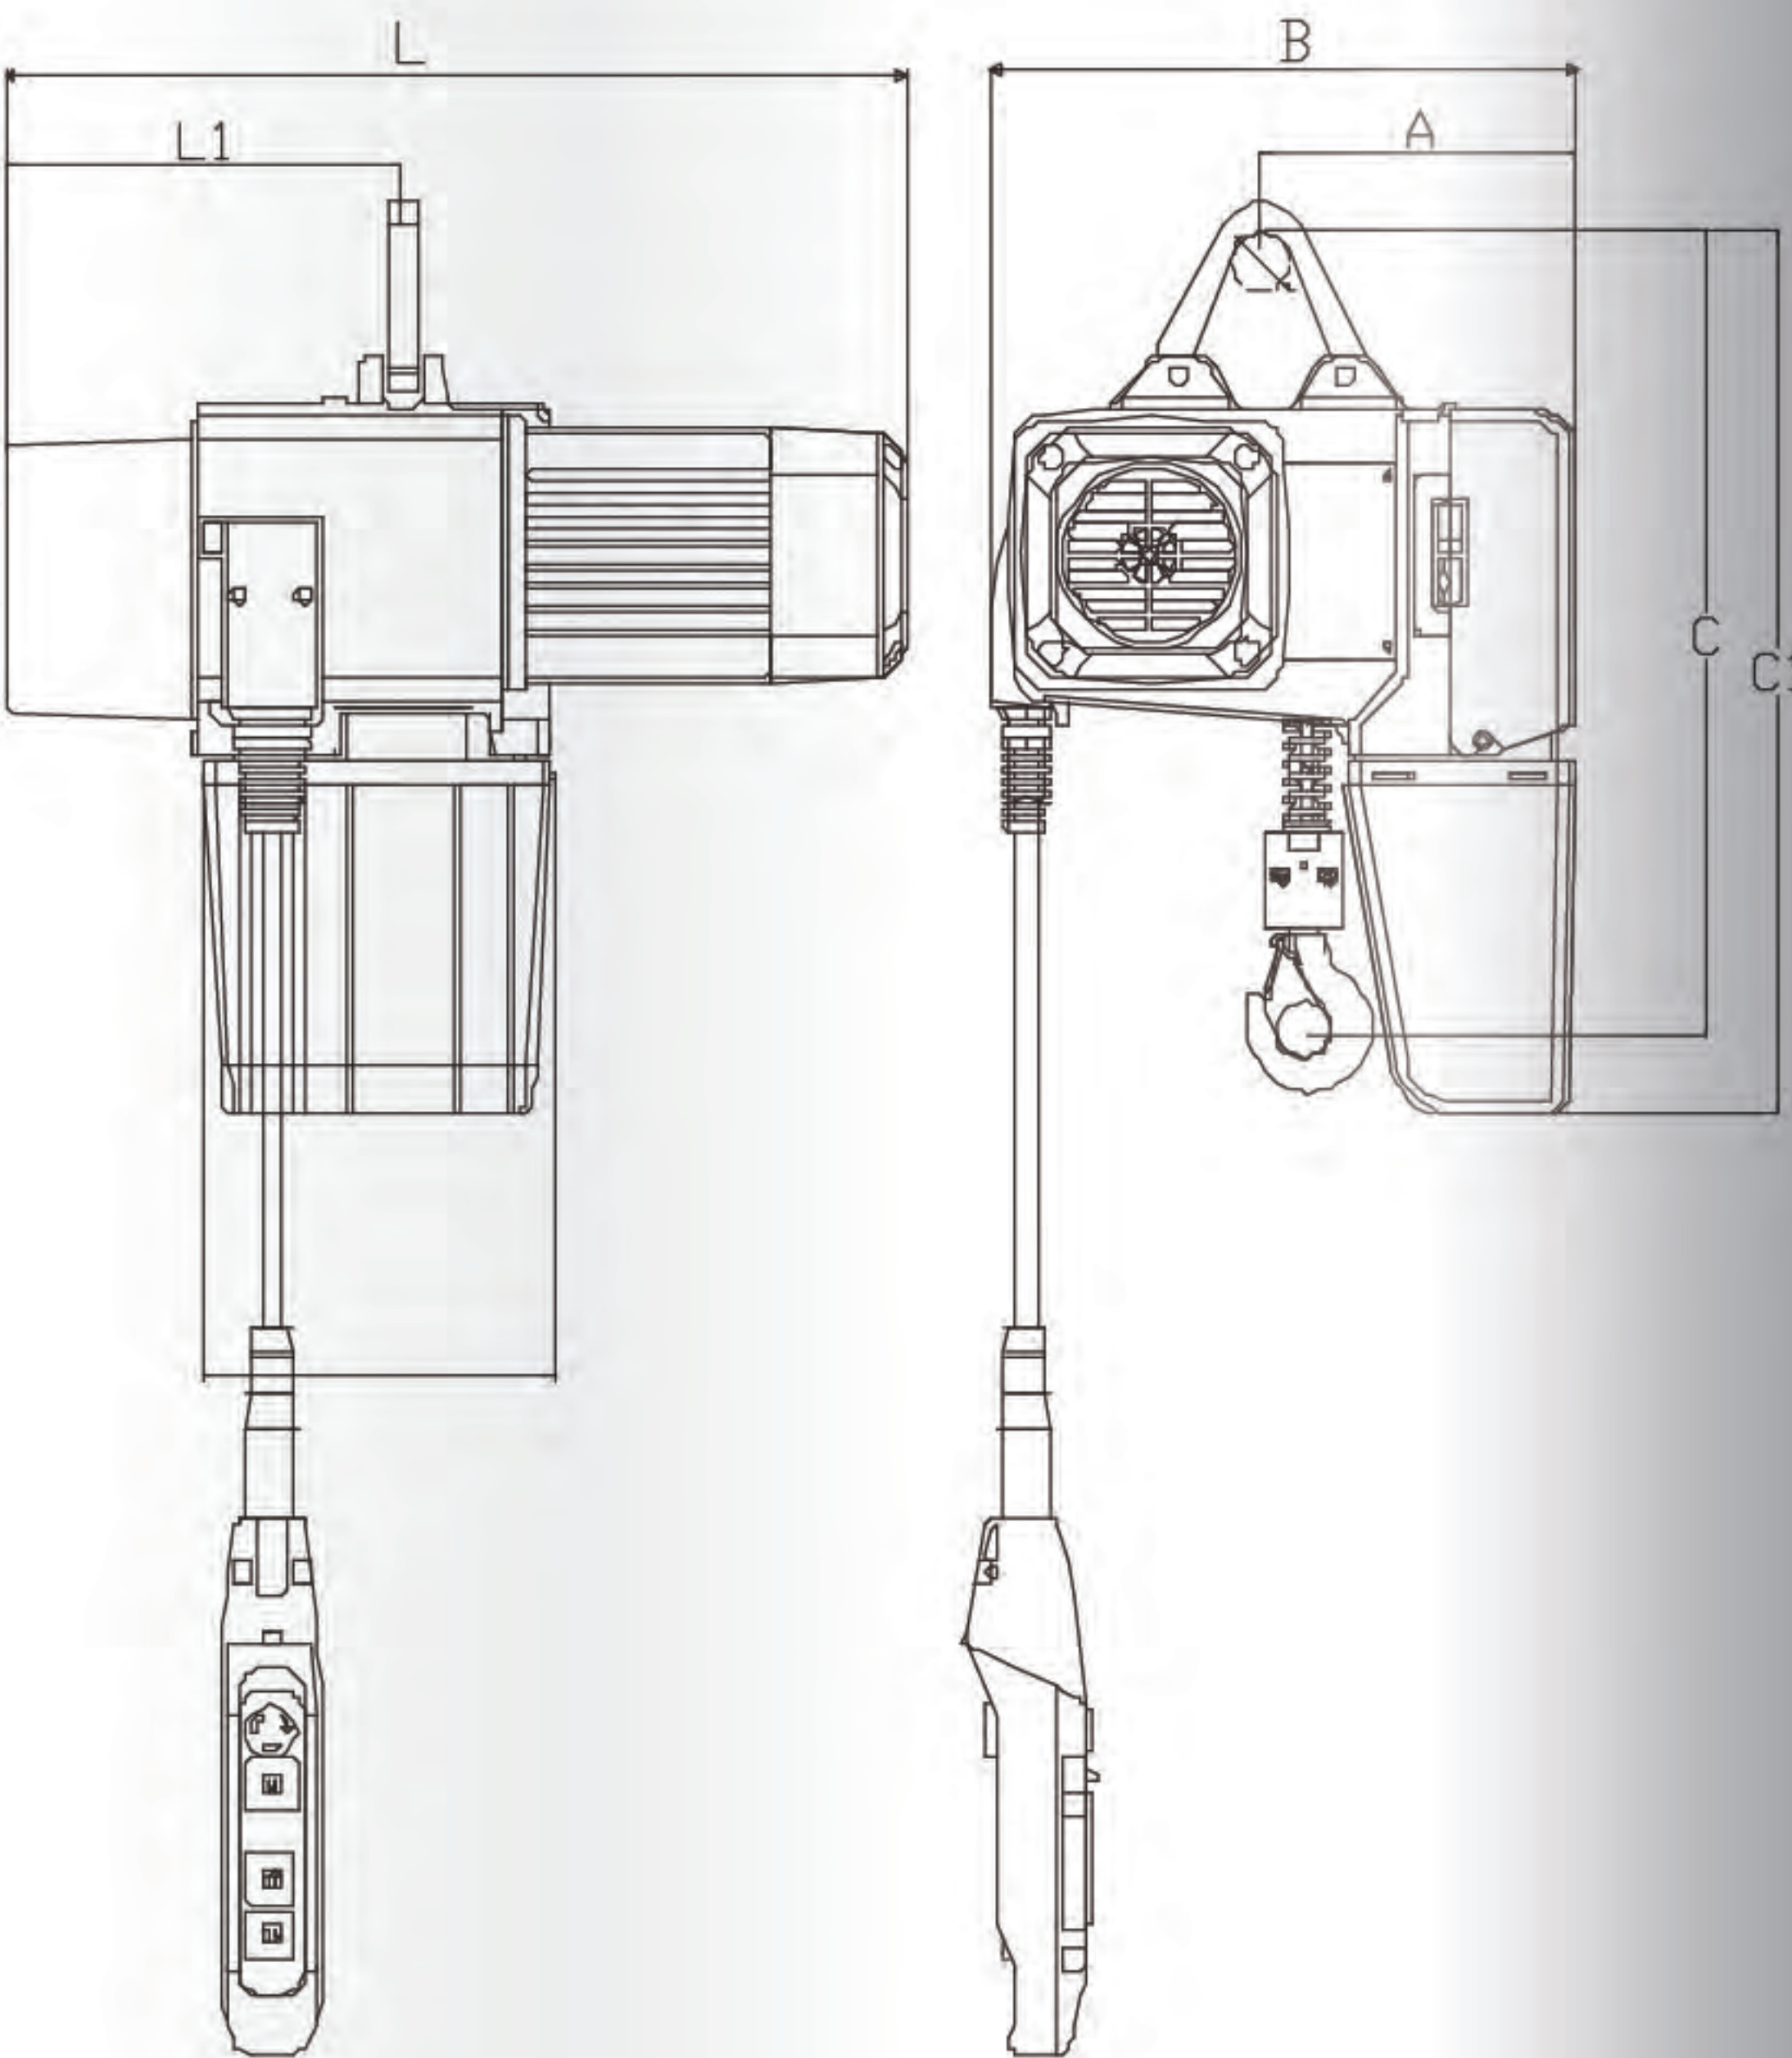

型号 Model	载重量 (KG)	起升速度 ( m/min )	电机功率 ( Kw )	电机转速 ( r/min )	工作电压 ( V )	控制电压 ( V )	工作级别 ( FEM/ISO )
SXHL0.125-01M	125	8/2	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL0.125-01M	125	13/3.2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.25-01M	250	8/2	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL0.5-01M	500	8/2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.5-01M	500	12/3	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL0.5-02M	500	4/1	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL01-01M	1000	8/2	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL01-01M	1000	6/1.5	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL01-02M	1000	4/1	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL02-02M	2000	4/1	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL02-02M	2000	3/0.75	1.5/0.37	2880/720	220-460	24	2M/M5

型号 Model	L	L1	A	B	C	C1
SXHL0.125-01M	440	194	160	288	400	425
SXHL0.125-01M	464	197	170	315	420	450
SXHL0.25-01M	440	194	160	288	400	425
SXHL0.5-01M	464	197	170	315	420	450
SXHL0.5-01M	548	239	182	343	560	640
SXHL0.5-02M	440	194	160	288	470	425
SXHL01-01M	548	239	182	343	560	640
SXHL01-02M	464	197	170	315	490	450
SXHL02-02M	548	271	182	343	630	640



EUROPEAN ELECTRIC  
CHAIN HOIST WITH  
MANUAL TROLLEY

欧式电动环链葫芦（配手动跑车）

◆ 基本特征

欧式电动环链葫芦可方便的安装到  
KBK标准组件的轨道上。

◆ Basic characteristics

European electric chain hoist can be installed to the  
KBK orbit of standard components

◆ 测试简单

所有电器连接均为插入式——即插即用通用  
型悬挂机构，既能用于KBK标准轨道又可与小车  
快速链接。

◆ Easy test

All electrical connection to plug in, plug and play universal  
suspension mechanism,both can used for KBK standard track  
and can be connected to trolley quickly

◆ 人性化设计

控制电缆长度可以调节，手电门总在最合适的位置。  
手电门人性化设计，握感舒适，免除操作疲劳。

◆ Humanized design

Control cable length can be adjusted,control pendant always in  
the most appropriate location.  
Control pendant is humanized design,grip feels comfortable,avoid  
operation fatigue

◆ 统一维修检测后盖

可用于电器接插，手电门高度调节，链条润滑。  
无需拆卸其他部件，快速更换起重链轮，减少停机  
时间。

◆ Unified maintenance test back cover

Can be used for electric plug,Control pendant can be high adjusted,  
the chain lubrication,without having to remove other components,  
fastly replace chain guide,and reduce downtime


◆ 标准双速电机，工作效率更高

低压24V控制更安全。

◆ Standard double speed motor,higher working efficiency  
24V control voldage is more safe

Technical Parameters

技术参数

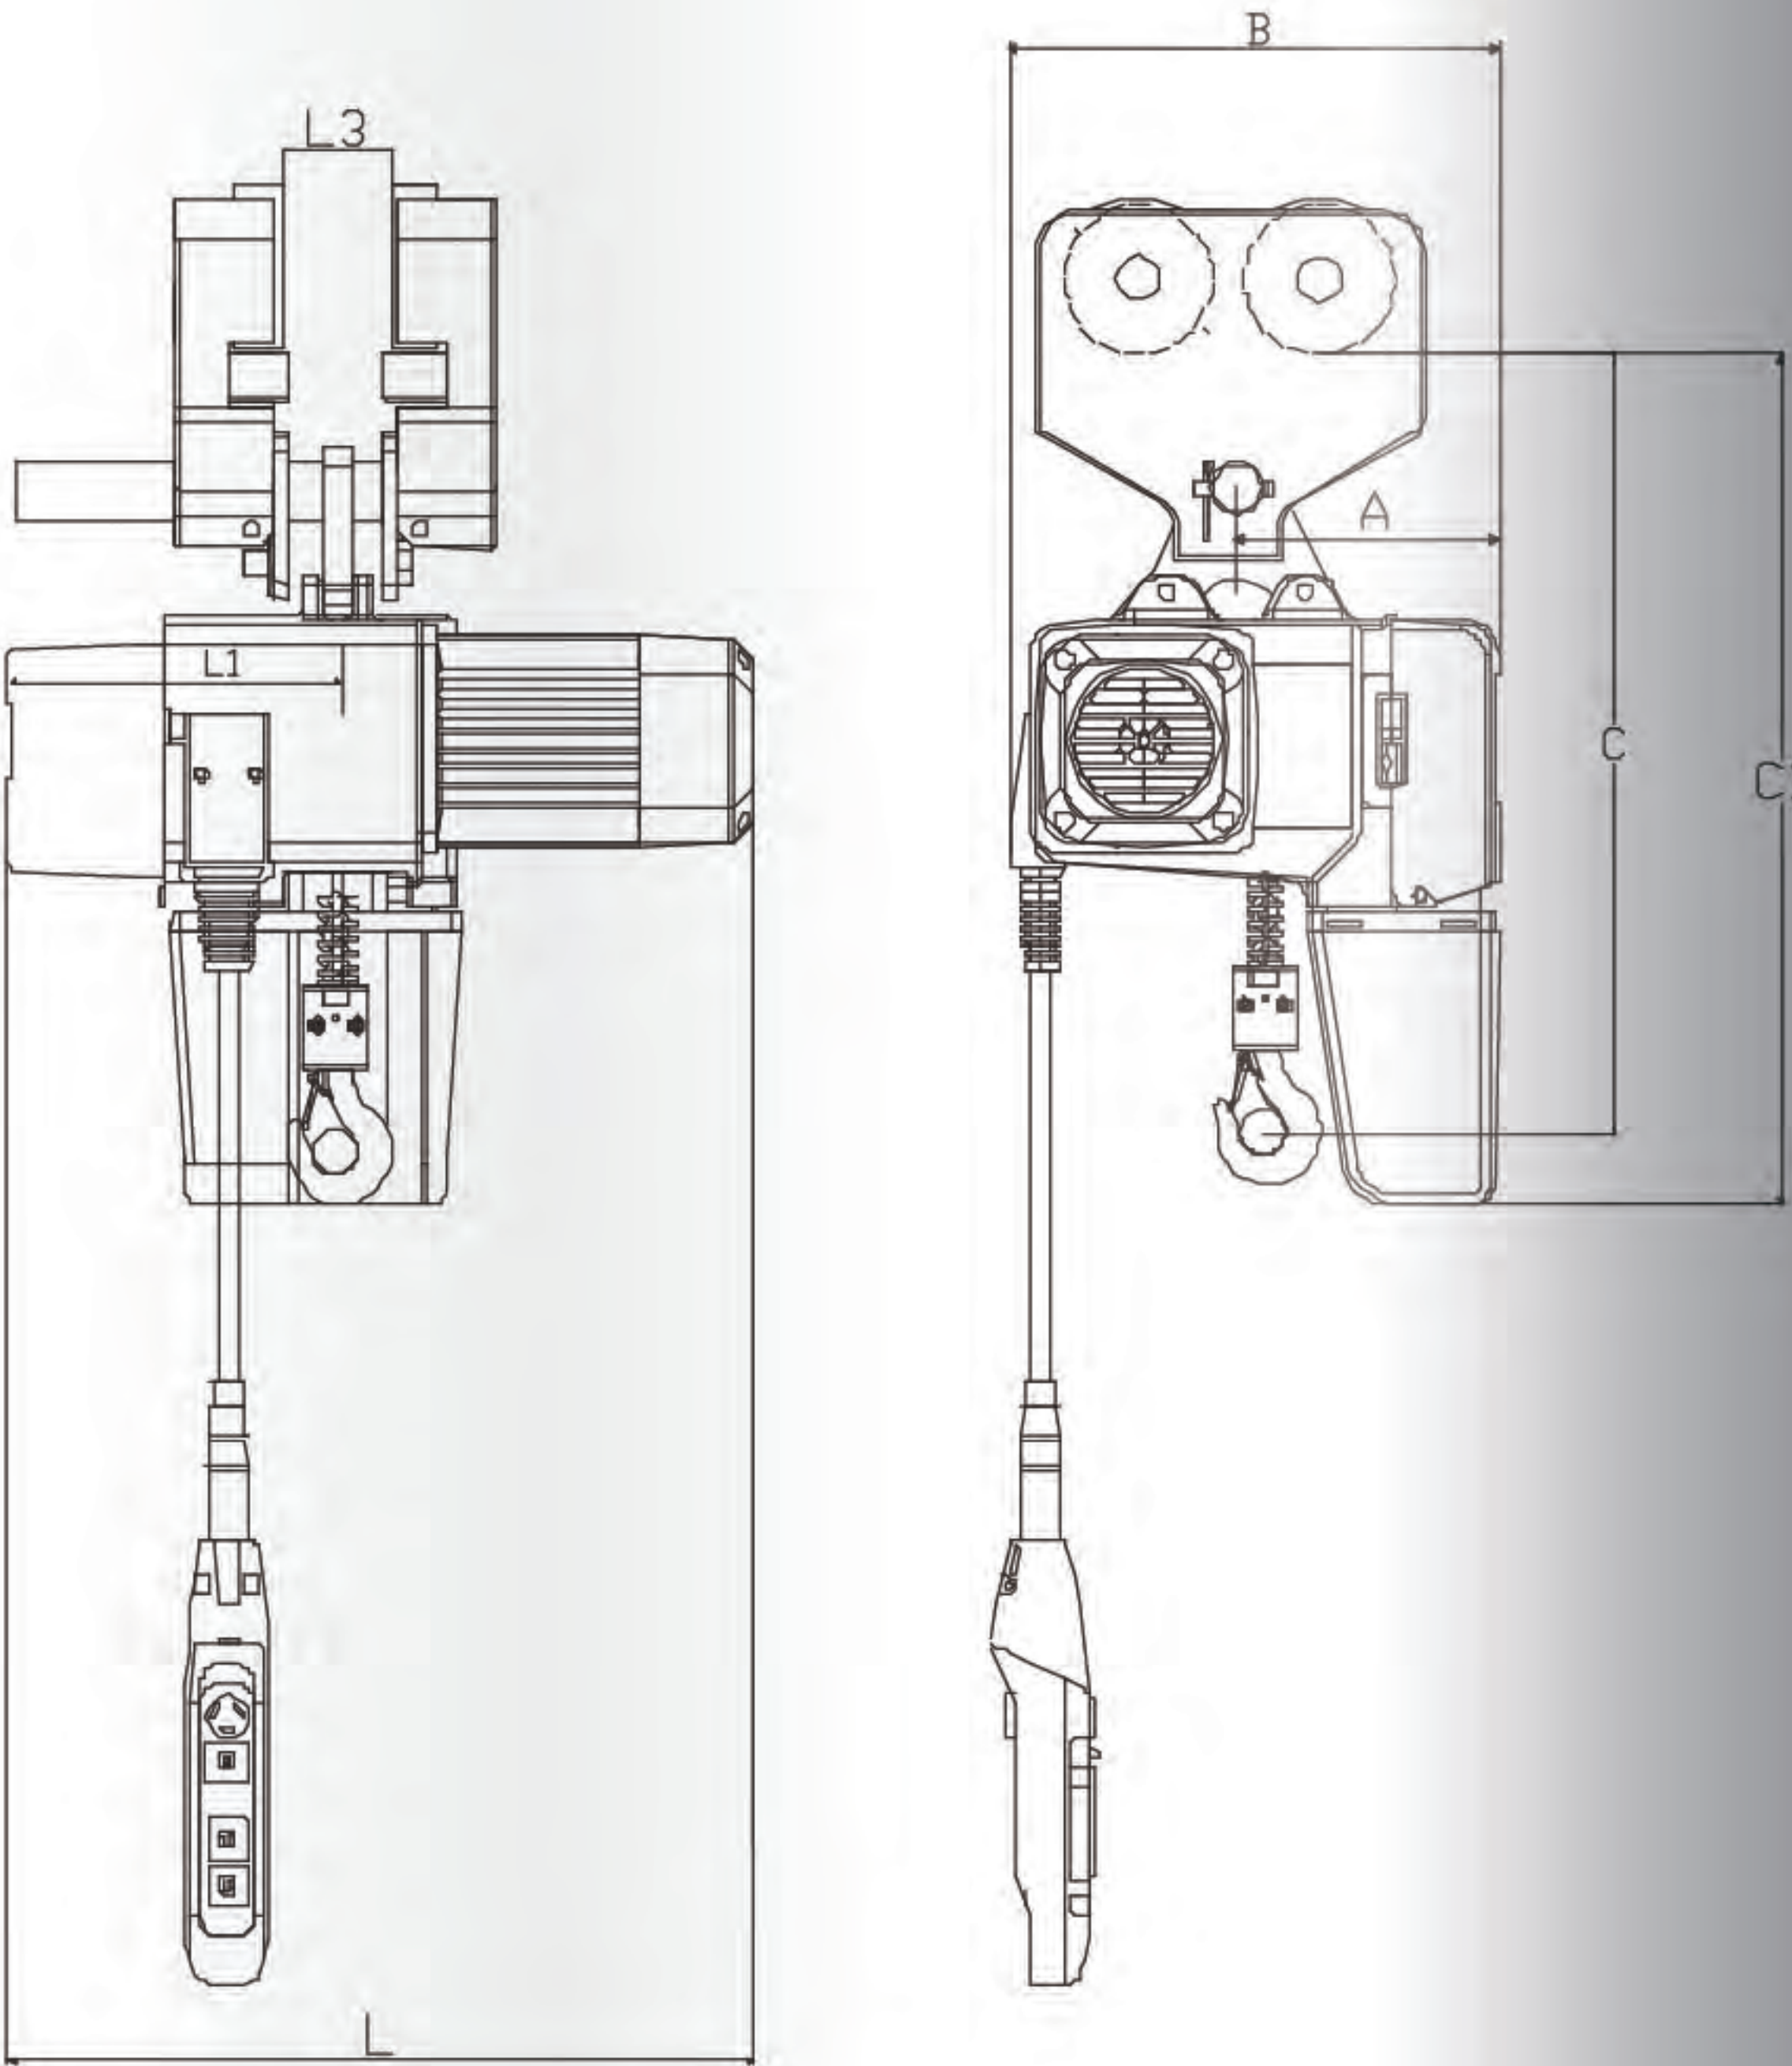


型号 Model	载重量 (KG)	起升速度 ( m/min )	电机功率 ( Kw )	电机转速 ( r/min )	工作电压 ( V )	控制电压 ( V )	工作级别 ( FEM/ISO )
SXHL0.125-01M	125	8/2	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL0.125-01M	125	13/3.2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.25-01M	250	8/2	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL0.5-01M	500	8/2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.5-01M	500	12/3	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL0.5-02M	500	4/1	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL01-01M	1000	8/2	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL01-01M	1000	6/1.5	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL01-02M	1000	4/1	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL02-02M	2000	4/1	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL02-02M	2000	3/0.75	1.5/0.37	2880/720	220-460	24	2M/M5

型号 Model	L	L1	L3	A	B	C	C1
SXHL0.125-01M	440	194	80-200	160	288	470	470
SXHL0.125-01M	464	197	80-200	170	315	490	495
SXHL0.25-01M	440	194	80-200	160	288	470	470
SXHL0.5-01M	464	197	80-200	170	315	490	495
SXHL0.5-01M	548	239	80-200	182	343	600	680
SXHL0.5-02M	440	194	80-200	160	288	540	470
SXHL01-01M	548	239	80-200	182	343	600	680
SXHL01-02M	464	197	80-200	170	315	560	495
SXHL02-02M	548	271	80-200	182	343	670	690



EUROPEAN ELECTRIC  
CHAIN HOIST WITH  
ELECTRIC TROLLEY

欧式电动环链葫芦（配电动跑车）

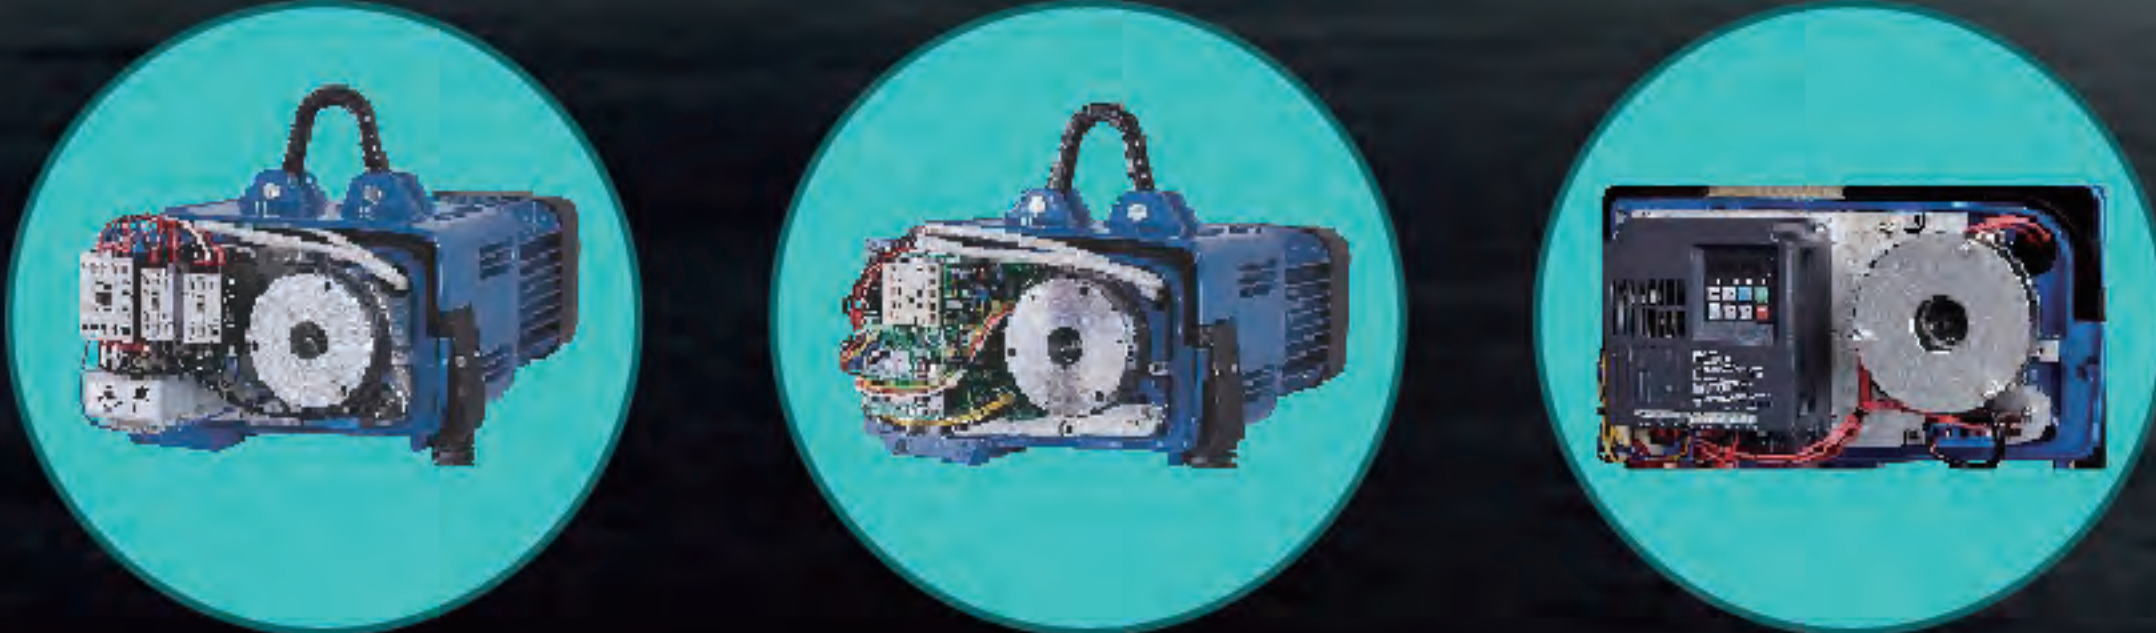

◆ 基本特征

欧式电动环链葫芦可方便的安装到  
KBK标准组件的轨道上。

◆ Basic characteristics

European electric chain hoist can be installed to the  
KBK orbit of standard components

◆ 测试简单

所有电器连接均为插入式——即插即用通用  
型悬挂机构，既能用于KBK标准轨道又可与小车  
快速链接。

◆ Easy test

All electrical connection to plug in, plug and play universal  
suspension mechanism,both can used for KBK standard track  
and can be connected to trolley quickly

◆ 人性化设计

控制电缆长度可以调节，手电门总在最合适的位置。  
手电门人性化设计，握感舒适，免除操作疲劳。

◆ Humanized design

Control cable length can be adjusted,control pendant always in  
the most appropriate location.  
Control pendant is humanized design,grip feels comfortable,avoid  
operation fatigue

◆ 统一维修检测后盖

可用于电器接插，手电门高度调节，链条润滑。  
无需拆卸其他部件，快速更换起重链轮，减少停机  
时间。


◆ Unified maintenance test back cover

Can be used for electric plug,Control pendant can be high adjusted,  
the chain lubrication,without having to remove other components,  
fastly replace chain guide,and reduce downtime

◆ 标准双速电机，工作效率更高  
低压24V控制更安全。

◆ Standard double speed motor,higher working efficiency  
24V control voldage is more safe

Technical Parameters  
技术参数

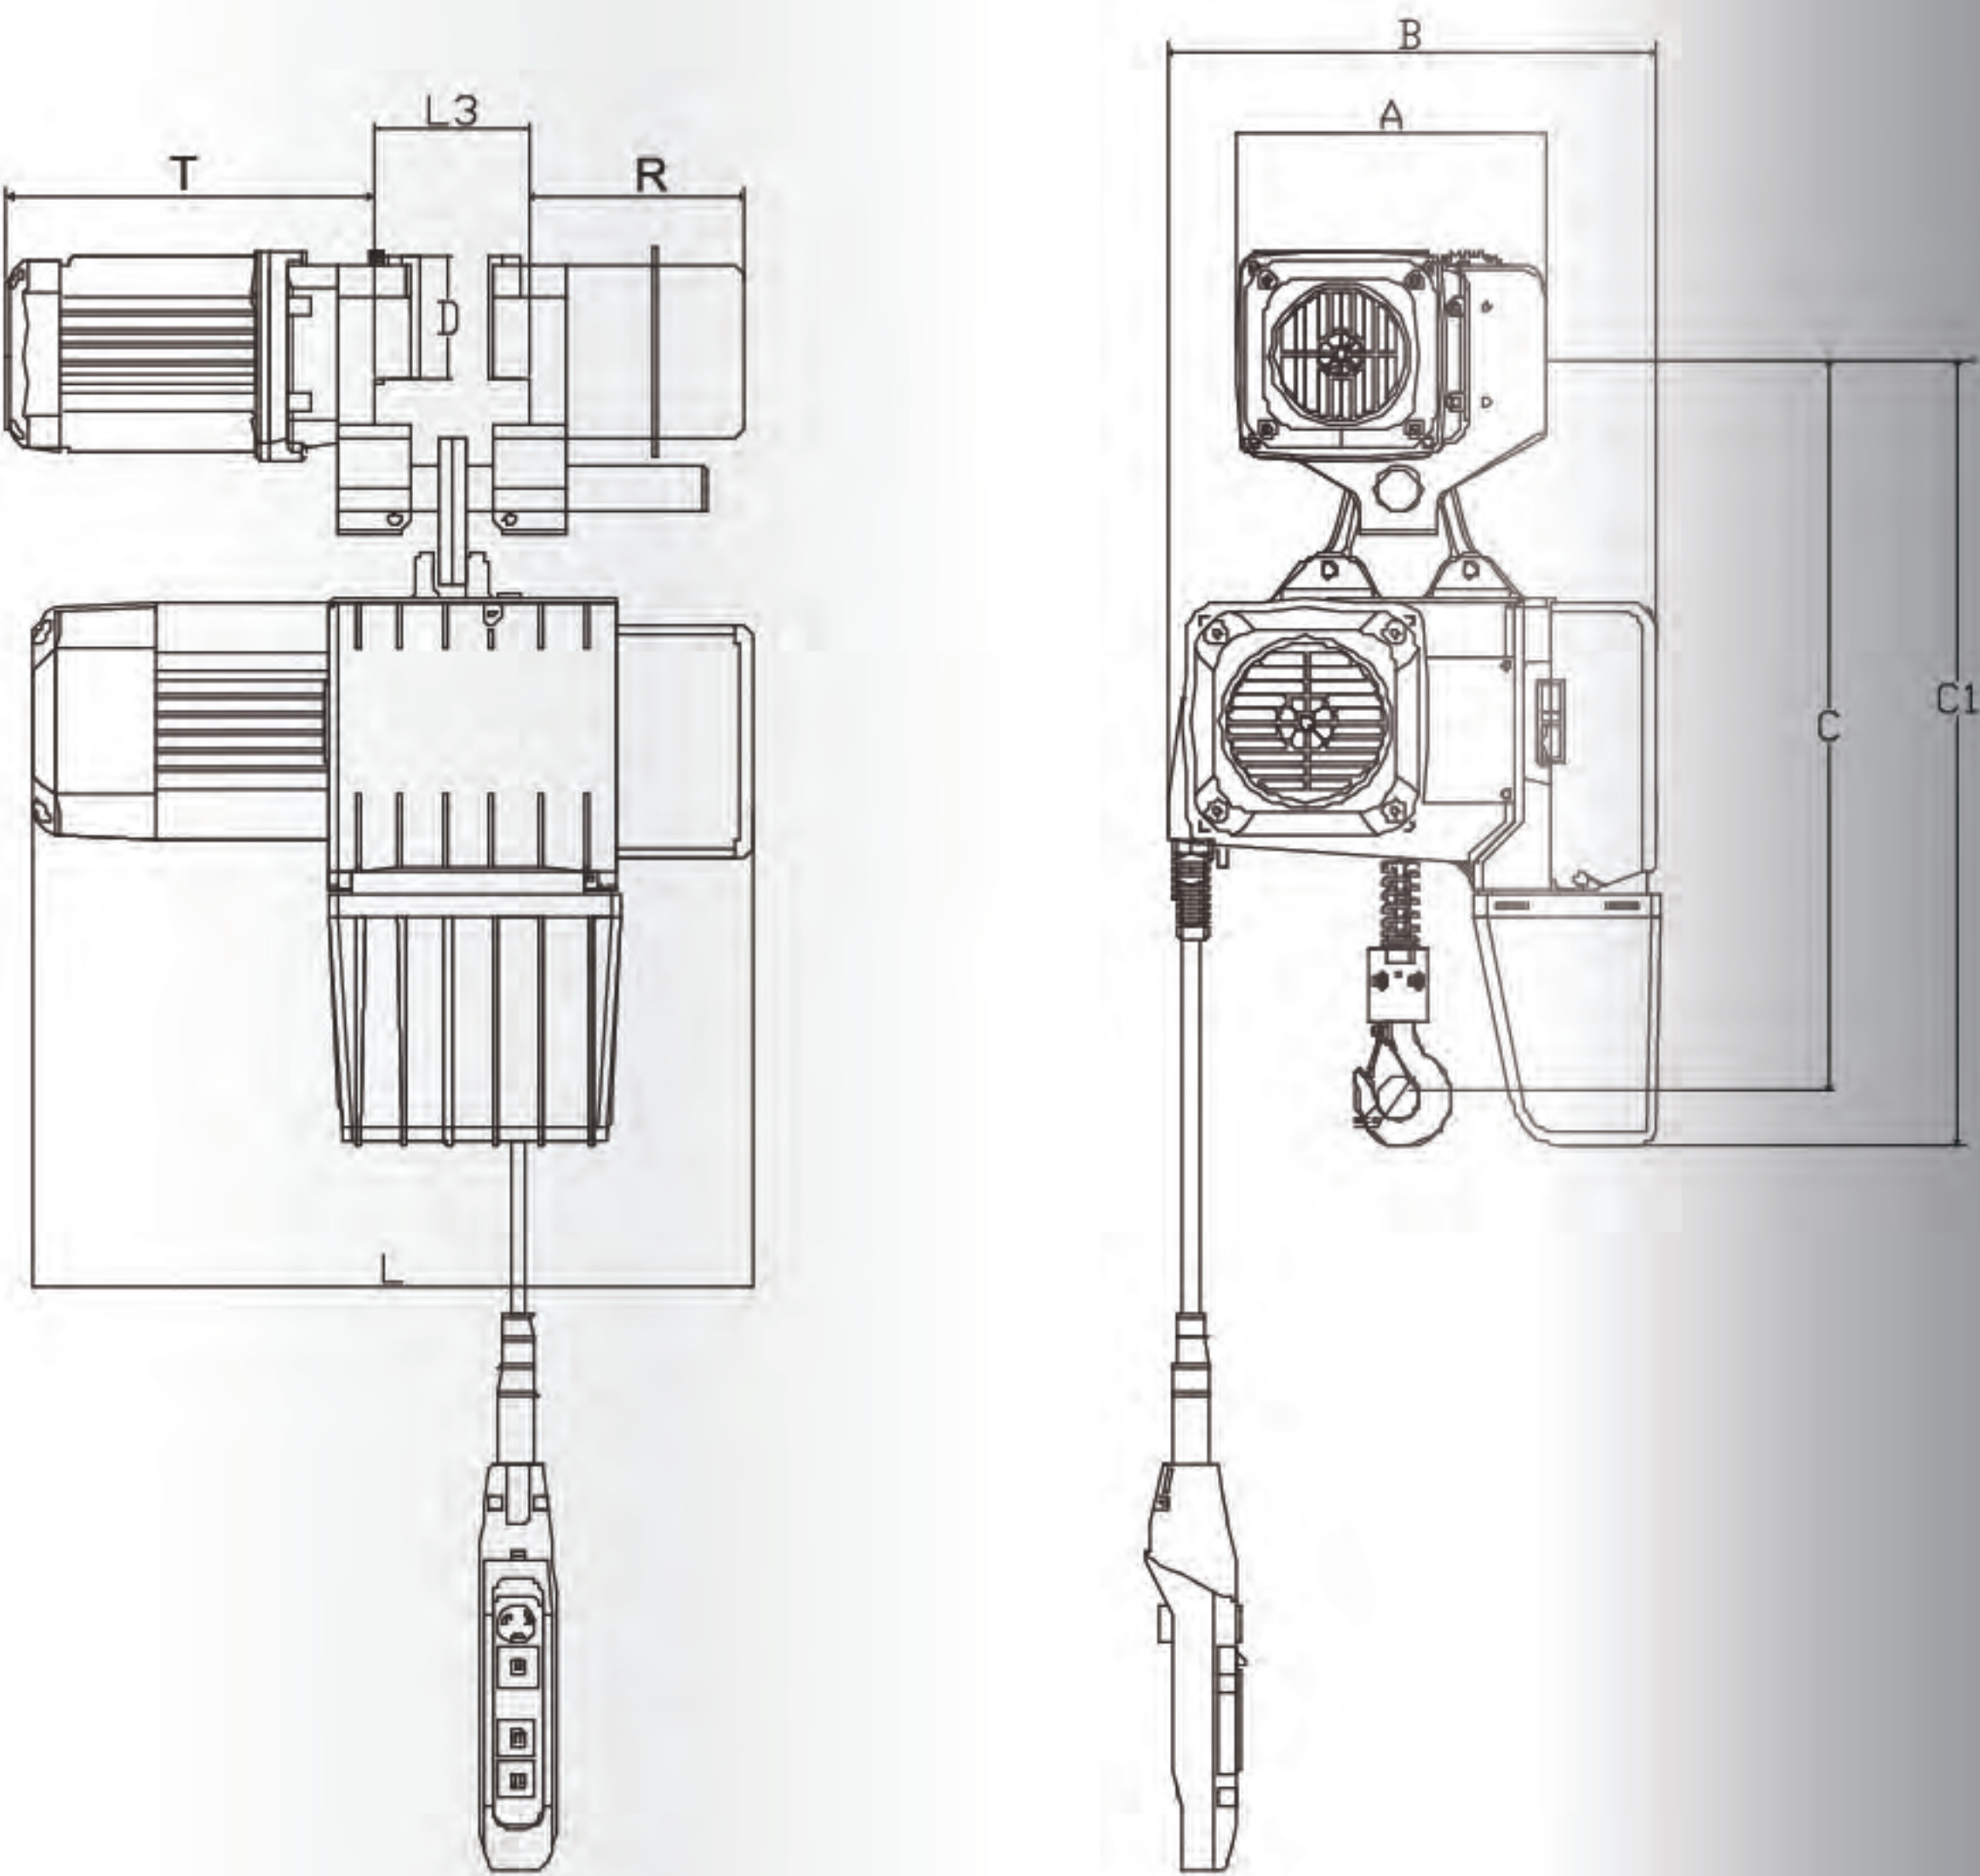

型号 Model	载重量 (KG)	起升速度 ( m/min )	电机功率 ( Kw )	电机转速 ( r/min )	工作电压 ( V )	控制电压 ( V )	工作级别 ( FEM/ISO )
SXHL0.125-01M	125	8/2	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL0.125-01M	125	13/3.2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.25-01M	250	8/2	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL0.5-01M	500	8/2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.5-01M	500	12/3	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL0.5-02M	500	4/1	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL01-01M	1000	8/2	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL01-01M	1000	6/1.5	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL01-02M	1000	4/1	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL02-02M	2000	4/1	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL02-02M	2000	3/0.75	1.5/0.37	2880/720	220-460	24	2M/M5

型号 Model	L	T	R	L3	A	B	C	C1
SXHL0.125-01M	440	280	175	80-200	210	288	470	470
SXHL0.125-01M	464	280	175	80-200	210	315	490	495
SXHL0.25-01M	440	280	175	80-200	210	288	470	470
SXHL0.5-01M	464	280	175	80-200	210	315	490	495
SXHL0.5-01M	548	280	175	80-200	210	315	600	680
SXHL0.5-02M	440	280	175	80-200	210	288	540	470
SXHL01-01M	548	285	175	80-200	335	343	600	680
SXHL01-02M	464	285	175	80-200	335	315	560	495
SXHL02-02M	548	285	175	80-200	385	343	670	690



EUROPEAN LOW  
HEADROOM TYPE  
ELECTRIC CHAIN HOIST  
欧式电动环链葫芦（低净空式）



◆ 基本特征

欧式电动环链葫芦可方便的安装到 KBK标准组件的轨道上。

◆ Basic characteristics

European electric chain hoist can be installed to the KBK orbit of standard components

◆ 测试简单

所有电器连接均为插入式——即插即用通用型悬挂机构，既能用于KBK标准轨道又可与小车快速链接。

◆ Easy test

All electrical connection to plug in, plug and play universal suspension mechanism,both can used for KBK standard track and can be connected to trolley quickly

◆ 人性化设计

控制电缆长度可以调节，手电门总在最合适的位置。  
手电门人性化设计，握感舒适，免除操作疲劳。

◆ Humanized design

Control cable length can be adjusted,control pendant always in the most appropriate location.  
Control pendant is humanized design,grip feels comfortable,avoid operation fatigue

◆ 统一维修检测后盖

可用于电器接插，手电门高度调节，链条润滑。  
无需拆卸其他部件，快速更换起重链轮，减少停机时间。



◆ Unified maintenance test back cover

Can be used for electric plug,Control pendant can be high adjusted, the chain lubrication,without having to remove other components, fastly replace chain guide,and reduce downtime

◆ 标准双速电机，工作效率更高  
低压24V控制更安全。

◆ Standard double speed motor,higher working efficiency  
24V control voldage is more safe

Technical Parameters  
技术参数

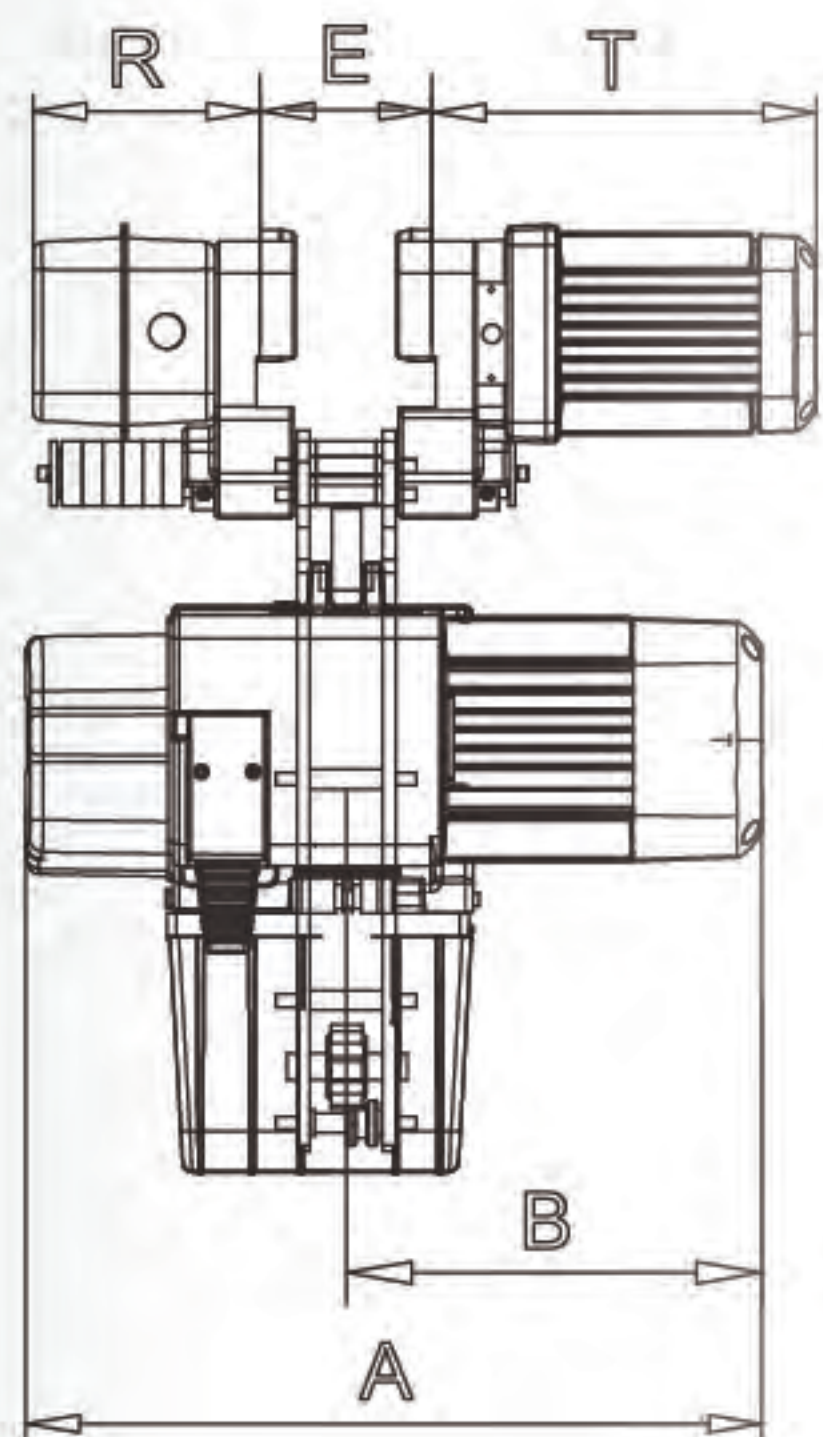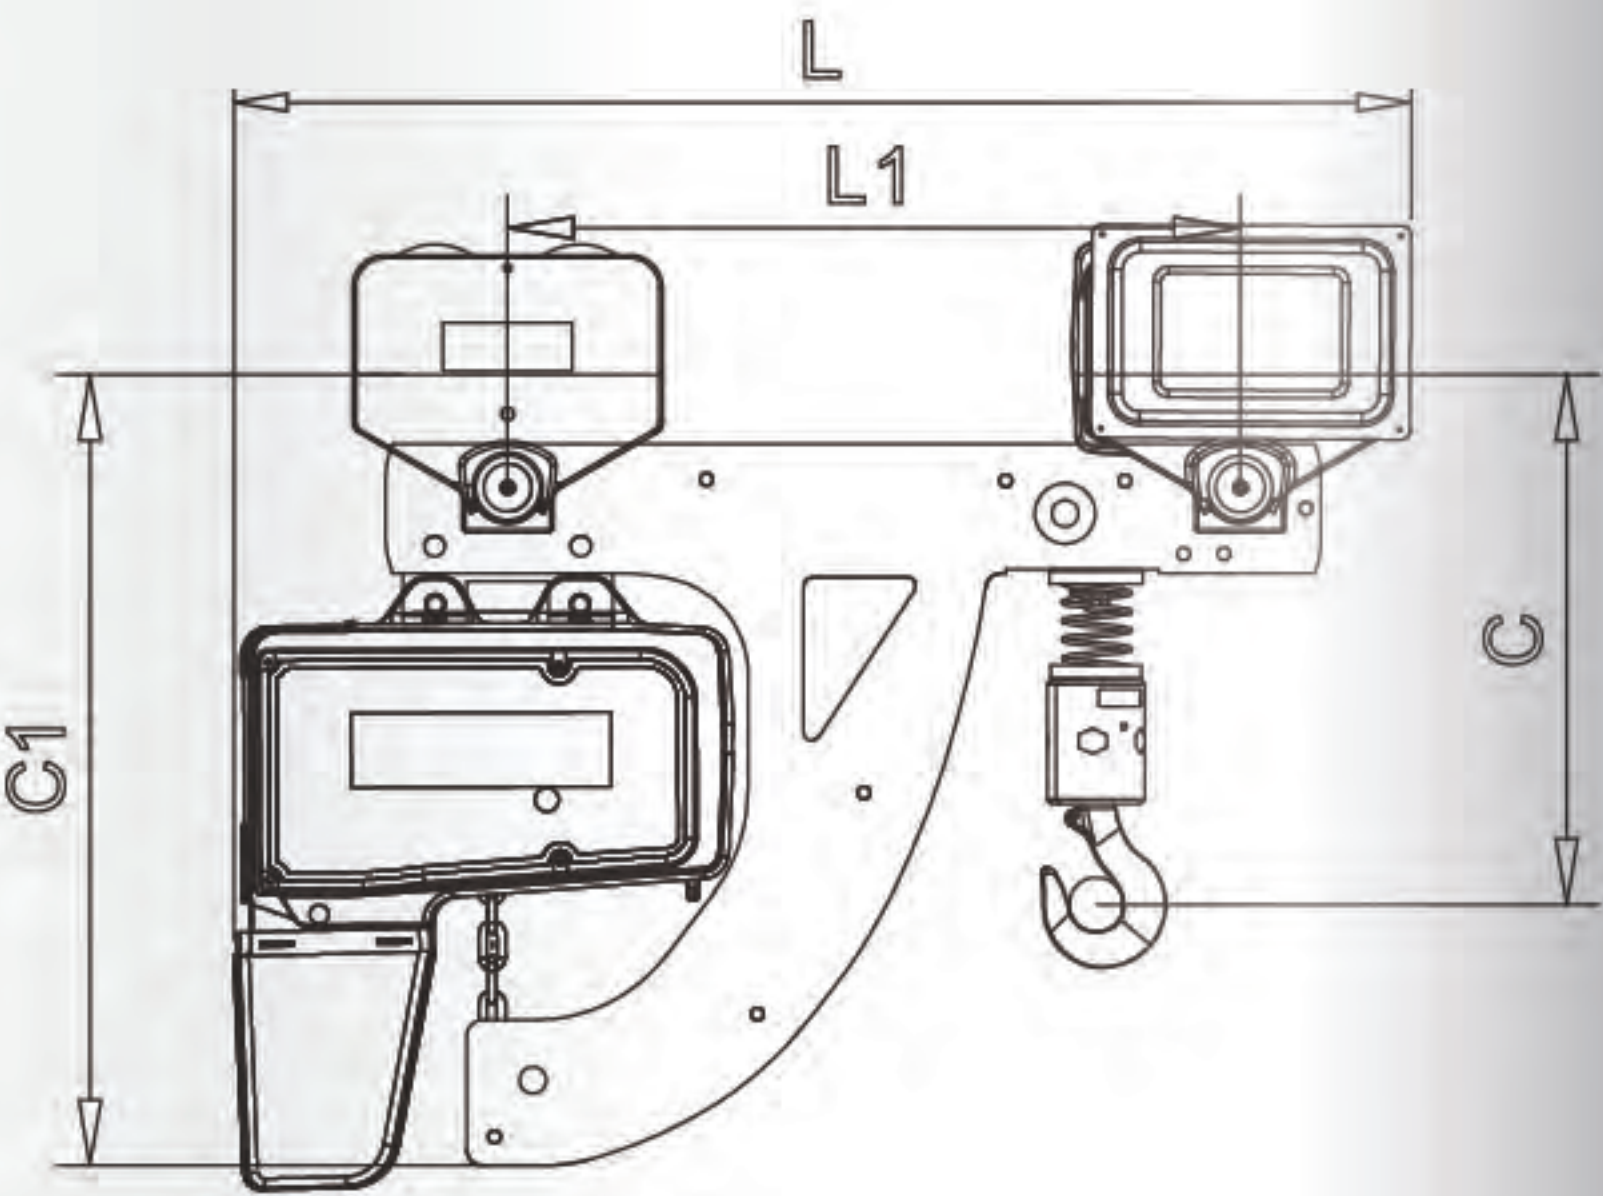

型号 Model	载重量 (KG)	起升速度 ( m/min )	电机功率 ( Kw )	电机转速 ( r/min )	工作电压 ( V )	控制电压 ( V )	工作级别 ( FEM/ISO )
SXHL0.125-01ML	125	8/2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.125-01ML	125	13/3.2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.25-01ML	250	8/2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.5-01ML	500	8/2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.5-01ML	500	12/3	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL0.5-02ML	500	4/1	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL01-01ML	1000	8/2	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL01-02ML	1000	4/1	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL02-02ML	2000	4/1	1.5/0.37	2880/720	220-460	24	2M/M5

型号 Model	L	L1	C	C1	A	B	T	E	R
SXHL0.125-01ML	730	453.5	330	490	464	267	280	80-200	175
SXHL0.125-01ML	730	453.5	330	490	464	267	280	80-200	175
SXHL0.25-01ML	730	453.5	330	490	464	267	280	80-200	175
SXHL0.5-01ML	730	453.5	330	490	464	267	280	80-200	175
SXHL0.5-02ML	730	453.5	410	490	464	267	280	80-200	175
SXHL01-01ML	840	548	350	630	548	305	285	80-200	175
SXHL01-02ML	790	453.5	410	490	464	267	285	80-200	175
SXHL02-02ML	910	548	510	630	548	305	285	80-200	175



EUROPEAN ELECTRIC  
CHAIN HOIST  
( DOUBLE HOOK )

欧式电动环链葫芦（双钩）



◆ 基本特征

欧式电动环链葫芦可方便的安装到  
KBK标准组件的轨道上。

◆ Basic characteristics

European electric chain hoist can be installed to the  
KBK orbit of standard components

◆ 测试简单

所有电器连接均为插入式——即插即用通用  
型悬挂机构，既能用于KBK标准轨道又可与小车  
快速链接。

◆ Easy test

All electrical connection to plug in, plug and play universal  
suspension mechanism,both can used for KBK standard track  
and can be connected to trolley quickly

◆ 人性化设计

控制电缆长度可以调节，手电门总在最合适的位置。  
手电门人性化设计，握感舒适，免除操作疲劳。

◆ Humanized design

Control cable length can be adjusted,control pendant always in  
the most appropriate location.  
Control pendant is humanized design,grip feels comfortable,avoid  
operation fatigue

◆ 统一维修检测后盖

可用于电器接插，手电门高度调节，链条润滑。  
无需拆卸其他部件，快速更换起重链轮，减少停机  
时间。

◆ Unified maintenance test back cover

Can be used for electric plug,Control pendant can be high adjusted,  
the chain lubrication,without having to remove other components,  
fastly replace chain guide,and reduce downtime

◆ 标准双速电机，工作效率更高



低压24V控制更安全。

◆ Standard double speed motor,higher working efficiency

24V control voldage is more safe

Technical Parameters

技术参数

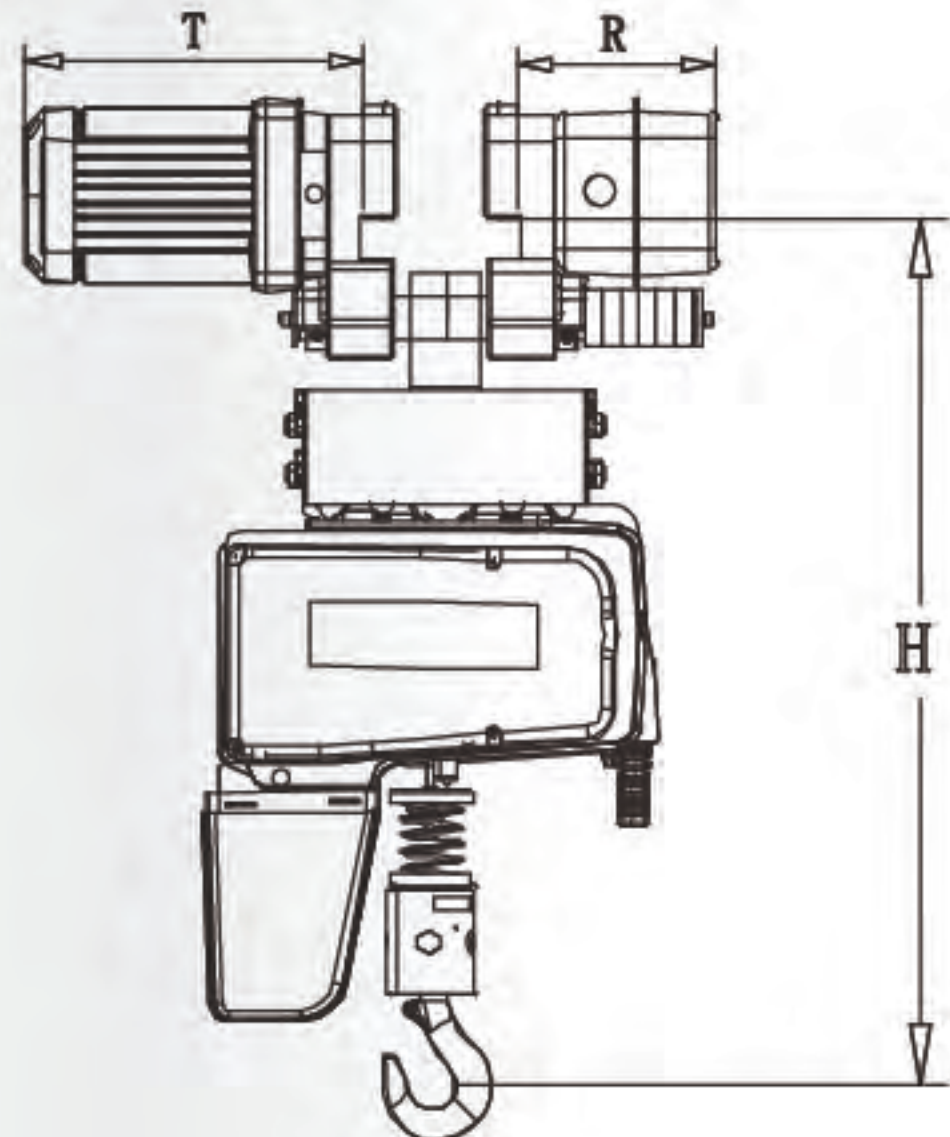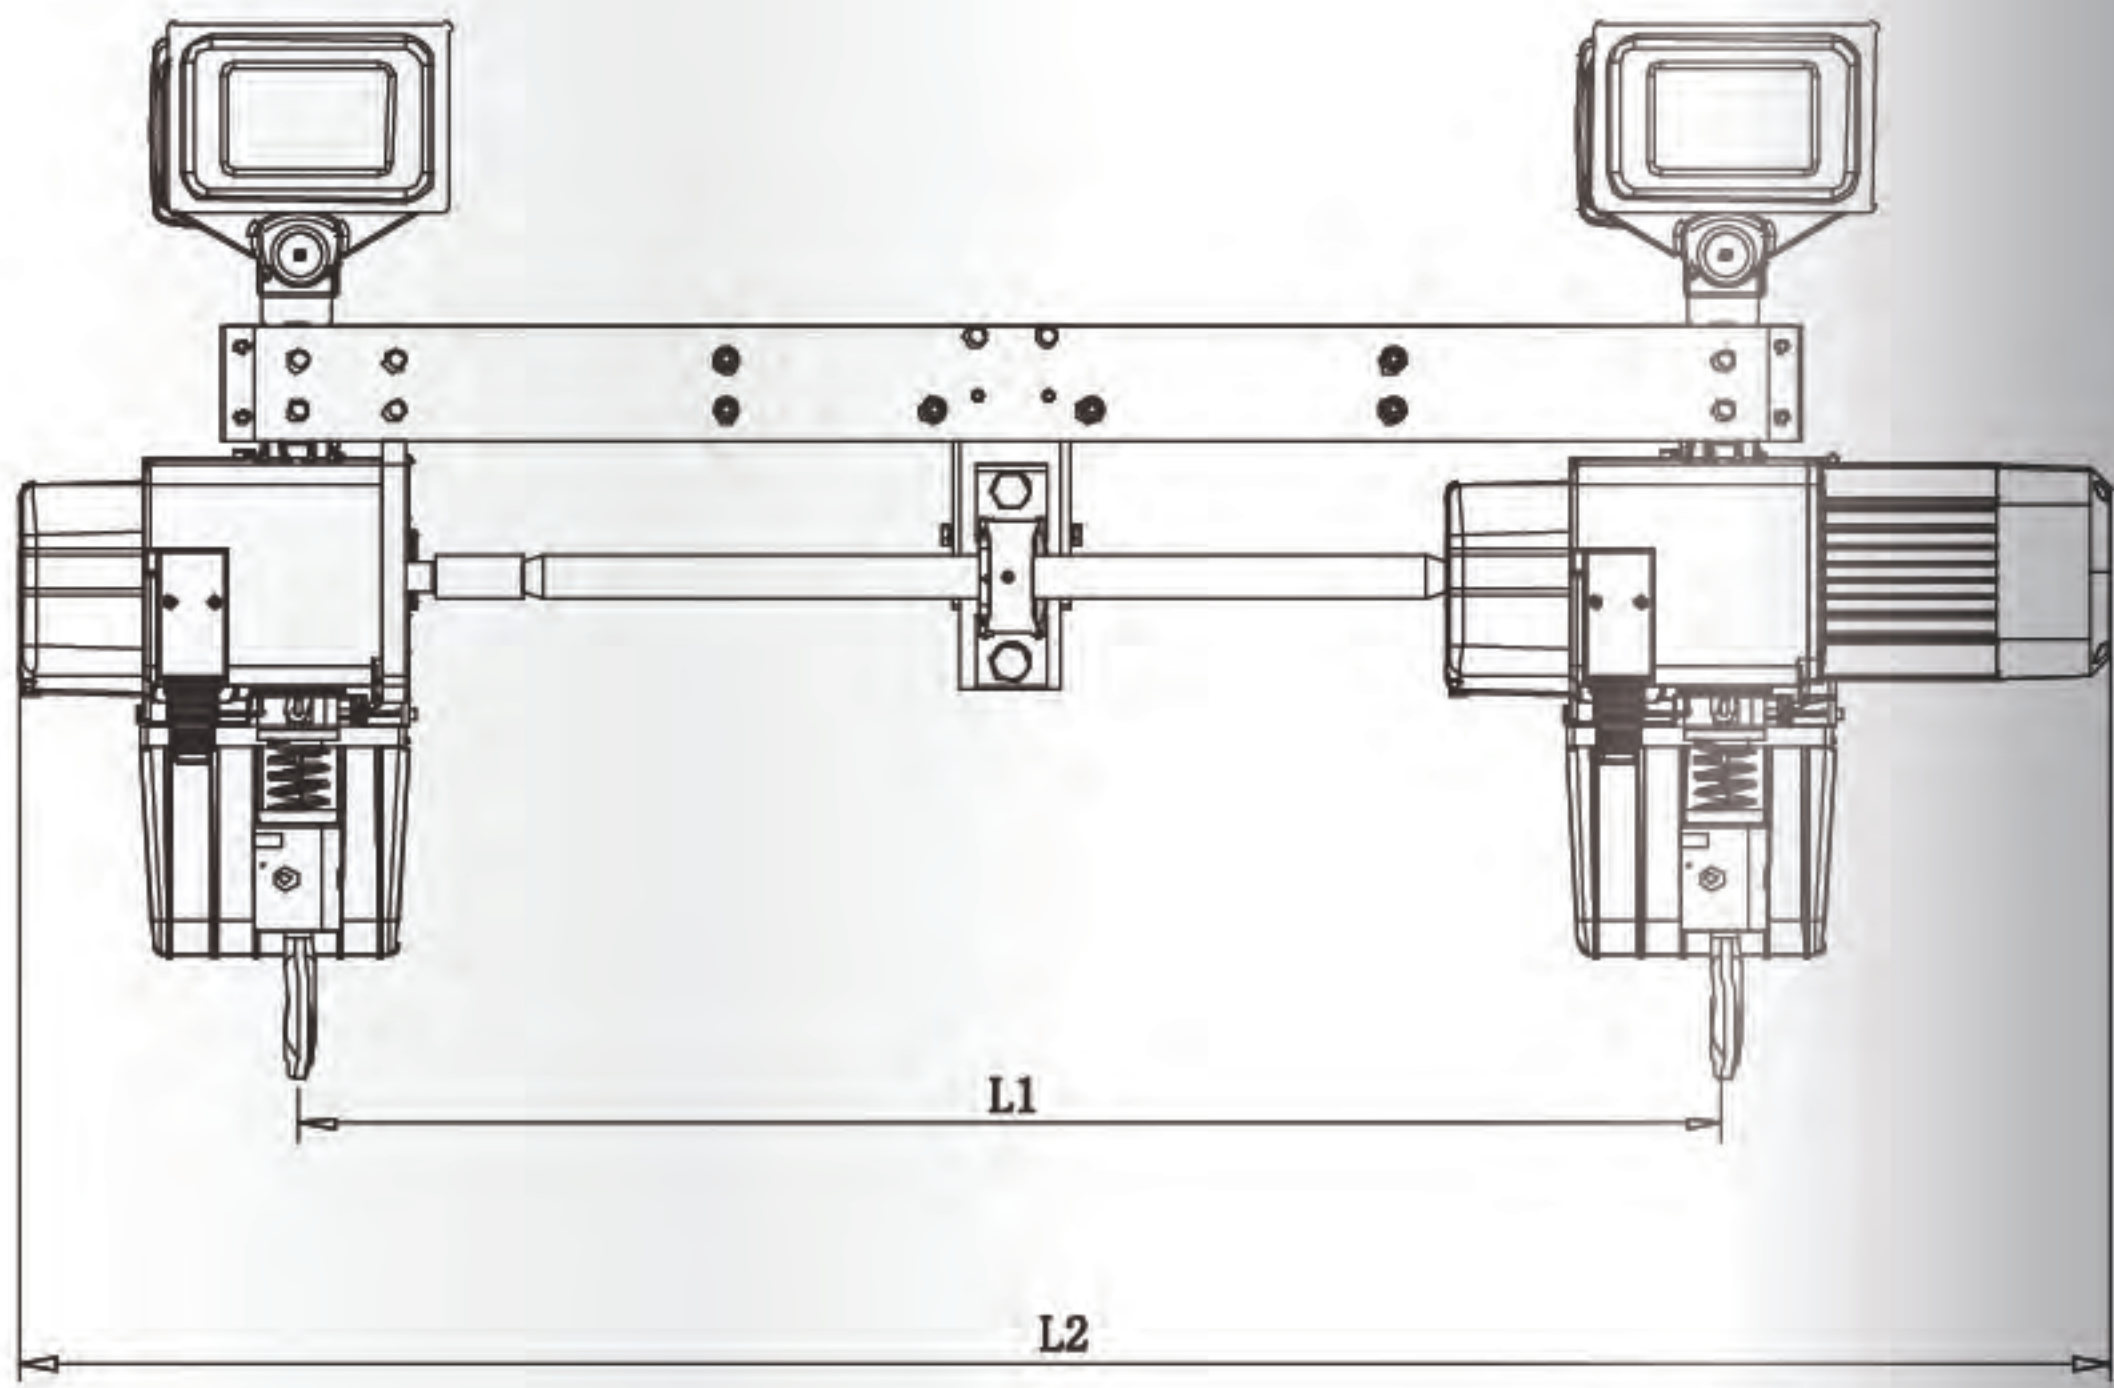

型号 Model	载重量 (KG)	起升速度 ( m/min )	电机功率 ( Kw )	电机转速 ( r/min )	工作电压 ( V )	控制电压 ( V )	工作级别 ( FEM/ISO )
SXHL0.125-01MD	125+125	8/2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.25-01MD	250+250	8/2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.5-01MD	500+500	8/2	1.5/0.37	2880/720	220-460	24	2M/M5
SXHL0.5-02MD	500+500	4/1	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL01-02MD	1000+1000	4/1	1.5/0.37	2880/720	220-460	24	2M/M5

型号 Model	A	B	T	E	R	H
SXHL0.125-01MD	按 客 户 需 要 订 做	L <sub>1</sub> +470	280	100-200	175	610
SXHL0.25-01MD		L <sub>1</sub> +470	280	100-200	175	610
SXHL0.5-01MD		L <sub>1</sub> +550	285	100-200	175	670
SXHL0.5-02MD		L <sub>1</sub> +470	285	100-200	175	700
SXHL01-02MD		L <sub>1</sub> +550	285	100-200	175	770




EUROPEAN ELECTRIC  
CHAIN HOIST  
(HAND CONTROL)  
欧式电动环链葫芦（手控式）



吊钩 250公斤  
旋转吊钩 250公斤  
开口吊钩 150公斤  
吊带 150公斤

Technical Parameters  
技术参数

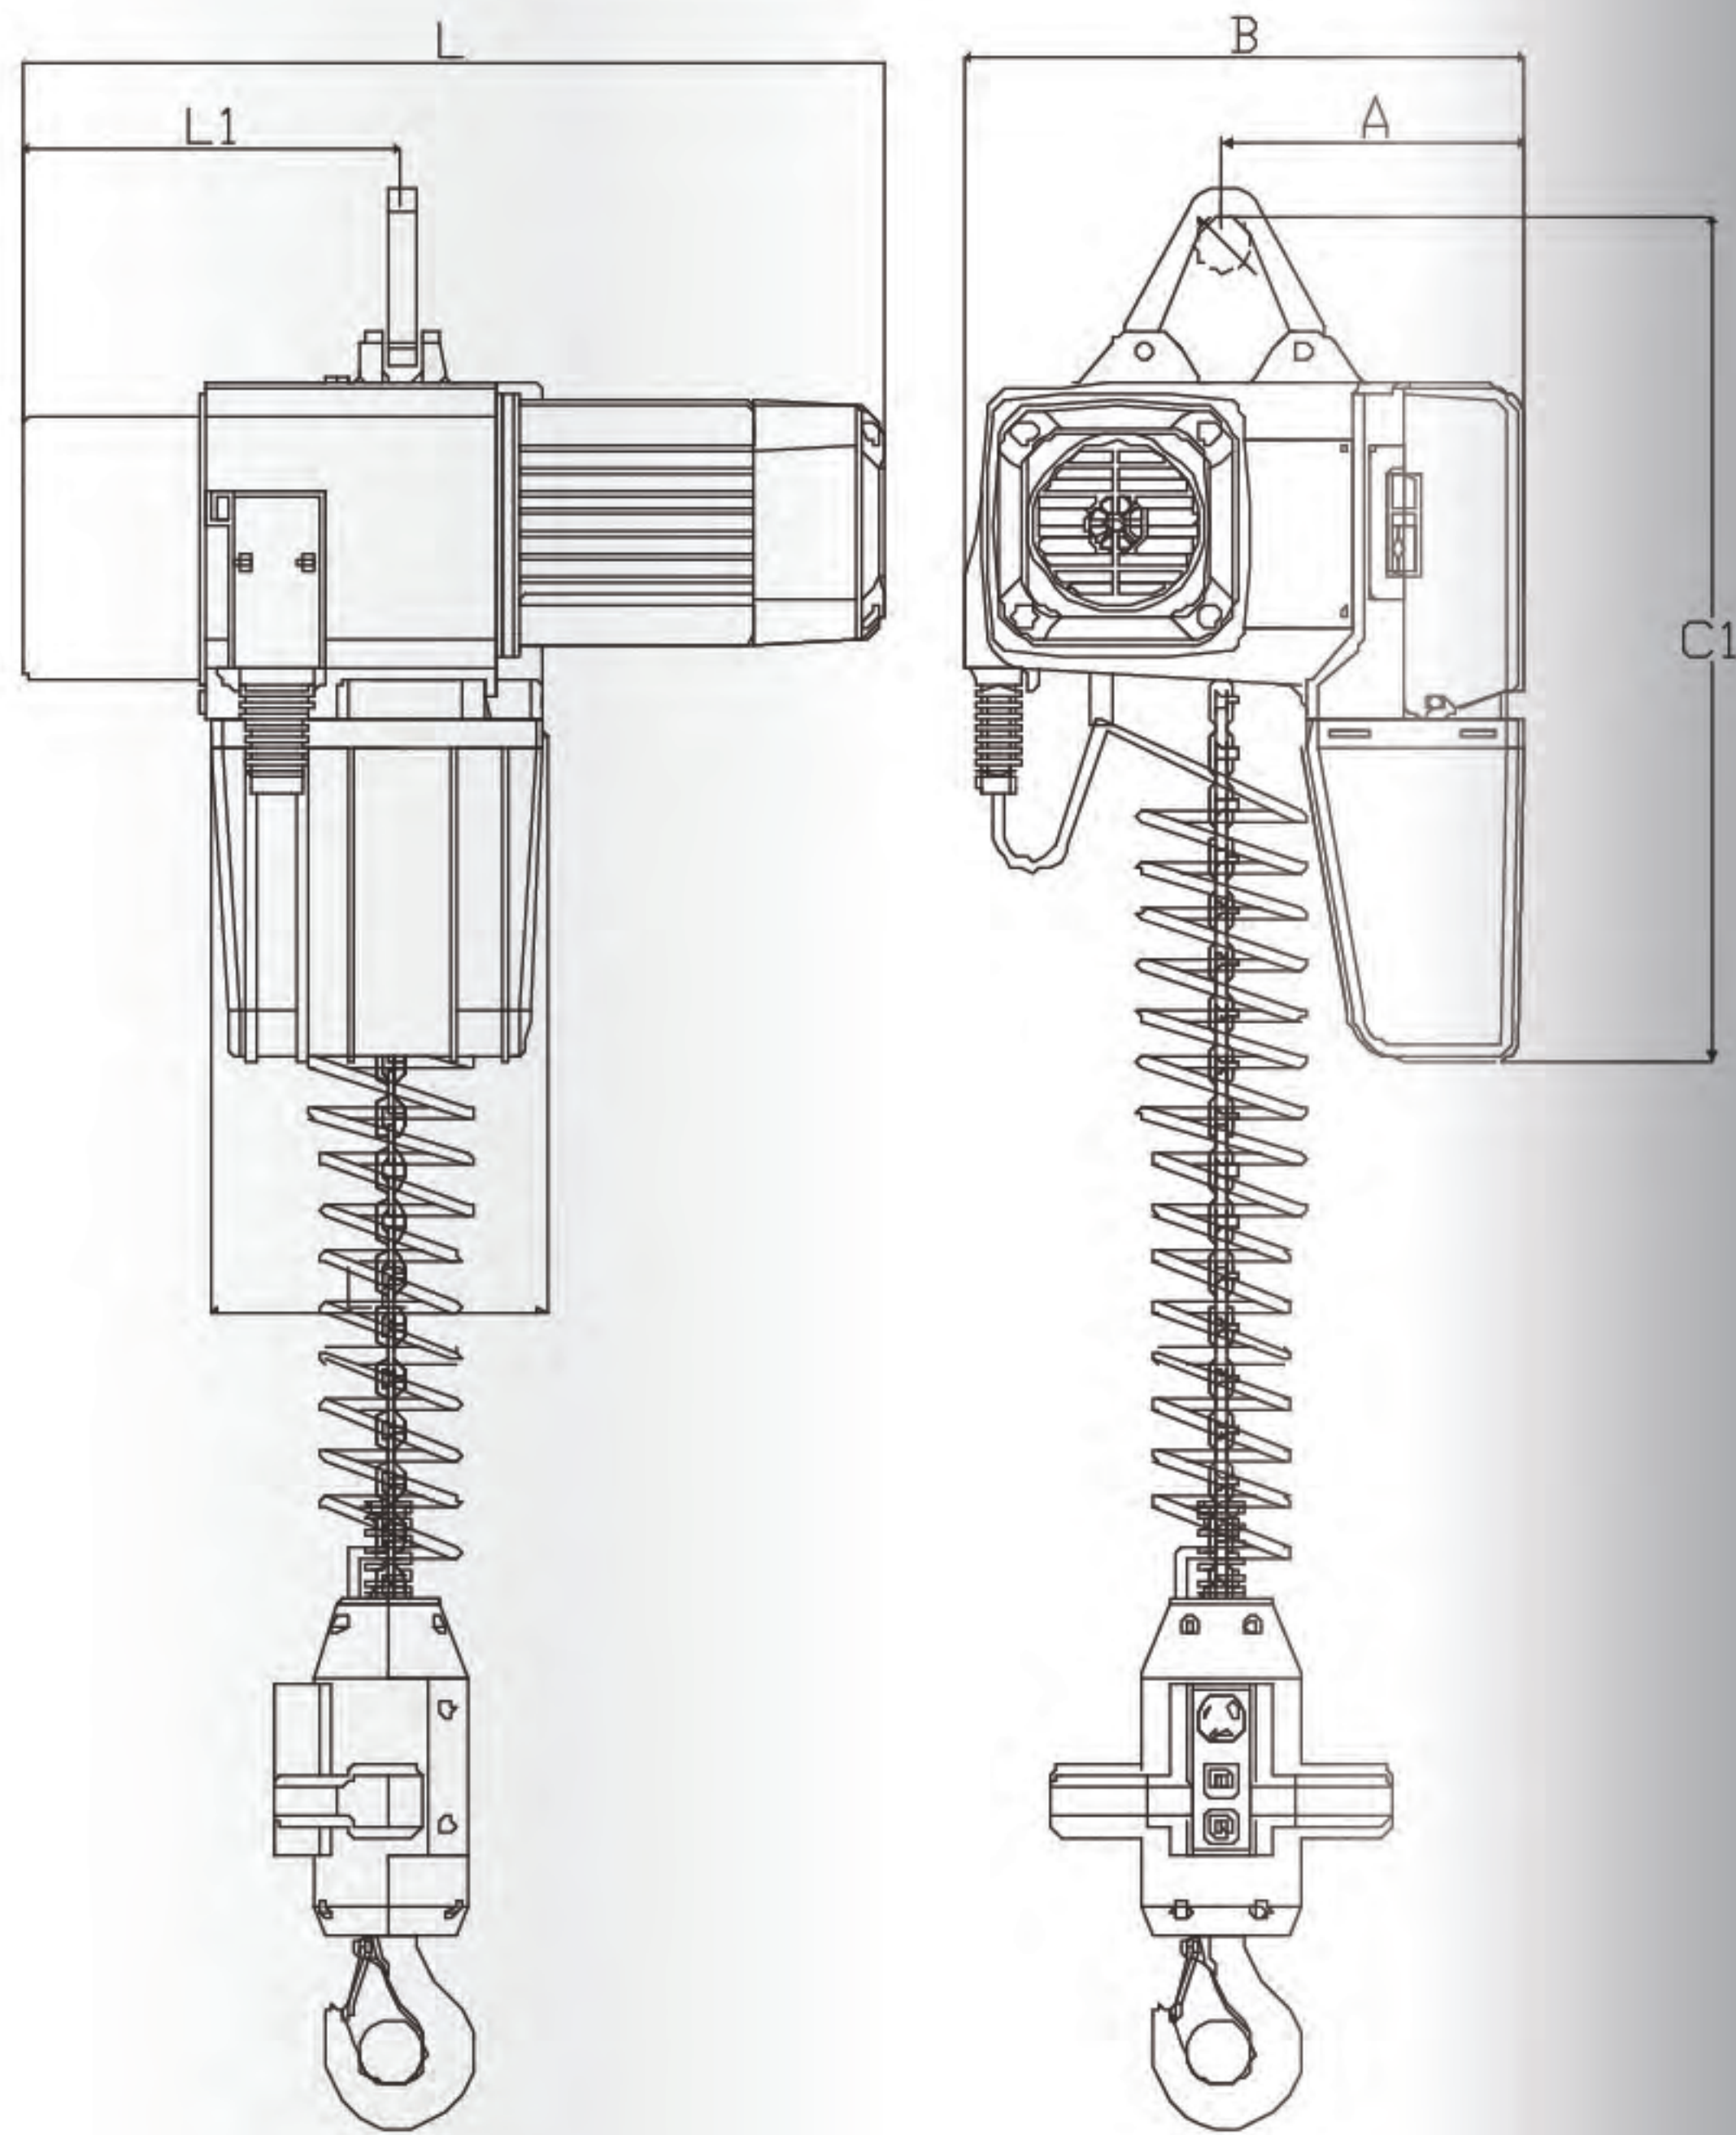

安全、快速，人性化设计的单手操作

手控电动葫芦单手即可快速、安全地吊运负载。控制单元与吊具的刚性连接使操作人员只需单手（左手或右手）操作葫芦，引导负载。

灵活用于各种任务

环链电动葫芦结合各种经过证实的吊具能够最佳地、灵活地以满足您的需求。这些附件包括标准的负载吊钩和各种缩放吊钳，以及平行夹钳系统，例如用于汽车工业的KLT集装箱。手控电动葫芦可与专门开发的吊具一起使用。

快速更换耦合器实现了各种吊具的轻松更换。所有手动电动葫芦的吊具都配有一个带防扭保险的耦合器插销，可卡进快速更换耦合器中。通过提起脱销装置，可以轻松地将其断开。

手控电动葫芦适用于KBK型钢和I型钢，这令他们能灵活用于工作和生产流程中。

通用的耦合器插销可用于连接专门根据客户要求而设计的吊具，它配有一个M12的内螺丝，用于连接专用的吊具。

手控吊具可通过适配器与环链电动葫芦连接。这种新型环链电动葫芦的灵活性大大提高了工厂的载荷吊运效率。



PGS平行夹钳  
125公斤



缩放吊钳用于  
抓取方形物品  
125公斤



缩放吊钳用于  
抓取圆形物品  
125公斤



吊钩适配器  
最大可承受  
250公斤



吊钩适配器结合  
PGS轴形夹钳

型号 Model	载重量 (KG)	起升速度 ( m/min )	电机功率 ( Kw )	电机转速 ( r/min )	工作电压 ( V )	控制电压 ( V )	工作级别 ( FEM/ISO )
SXHL0.125-01MH	125	8/2	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL0.125-01MH	125	13/3.2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL0.25-01MH	250	8/2	0.4/0.1	2880/720	220-460	24	2M/M5
SXHL0.5-01MH	500	8/2	0.75/0.2	2880/720	220-460	24	2M/M5
SXHL01-01MH	1000	8/2	1.5/0.37	2880/720	220-460	24	2M/M5

型号 Model	L	L1	A	B	C1
SXHL0.125-01MH	440	194	160	288	425
SXHL0.125-01MH	464	197	170	315	450
SXHL0.25-01MH	440	194	160	288	425
SXHL0.5-01MH	464	197	170	315	450
SXHL01-01MH	548	260	182	343	640



## 更高的利用率 带来更大的效率和受益

直观负载搬运从未如此简单、高效：作为我们SX系列的重要组成产品，十星环链电动平衡吊带有平衡功能，可轻松引导和精确定位负载。十星环链电动平衡吊钩包括多种规格，负载能力高达500kg。它们与我们有着广泛应用的KBK轻型起重机完美结合。

十星环链电动平衡吊可以在KBK轨道上轻松运行，应用包括：单梁悬挂式起重机、悬挂式单轨系统或悬臂起重机。

## 强大的安全性和可靠性 十星核心功能：

- ◆ 手柄感应手部控制负载的起升和下降
- ◆ 灵活操控负载
- ◆ 链条张紧功能
- ◆ 防止突然抓取负载
- ◆ 抑制负载晃动
- ◆ 持续载荷监控

### 特性：

- ◆ 运行限位开关（上/下）
- ◆ 运行时间计数器
- ◆ 得益于运行数据界面（IDAPSY），安装更透明

### 安装便捷：

- ◆ “即插即用” 插拔式电气连接

## 直观操作 精确定位

Intuitive operation  
Accurate locating



## 带有平衡功能的十星® 环链电动葫芦

SISINSING® with Balance  
Function Electric Chain  
Hoist

## 您将由此受益

You will benefit from this

### 抓握控制

- ◆ “手柄控制模式” 通过D-Grip伺服控制手柄轻松控制负载。

### 荷载定位

- ◆ 切换“荷载定位模式”，操作员仅需手扶载荷轻轻用力，即可直接牵引载荷。

### 装配模式

- ◆ 抑制任何载荷摆动和不受控制的运动，使装配操作具备极高的安全性和精确性。

### 载荷抓取模式

- ◆ 可提升和预张紧吊具。
- ◆ 负载卸下的同时不会引起吊钩突然的下落或上升
- ◆ 保护夹具和设备。只有在达到预设力时，平衡器才会举升。









强大的安全性和可靠性

- 再生制动，减少制动器磨损
- 刹车无需补偿调整
- 在传动机构的布局中，制动器布置在滑动离合器之前（杜绝负载下滑现象）
- 发生故障时自动制动
- 通过速度监控自动切断滑动离合器（无溜钩现象）
- 减速箱、摩擦离合器和制动器免维护
- 安全相关功能满足ENISO13849-1标准的性能等级C级和2类

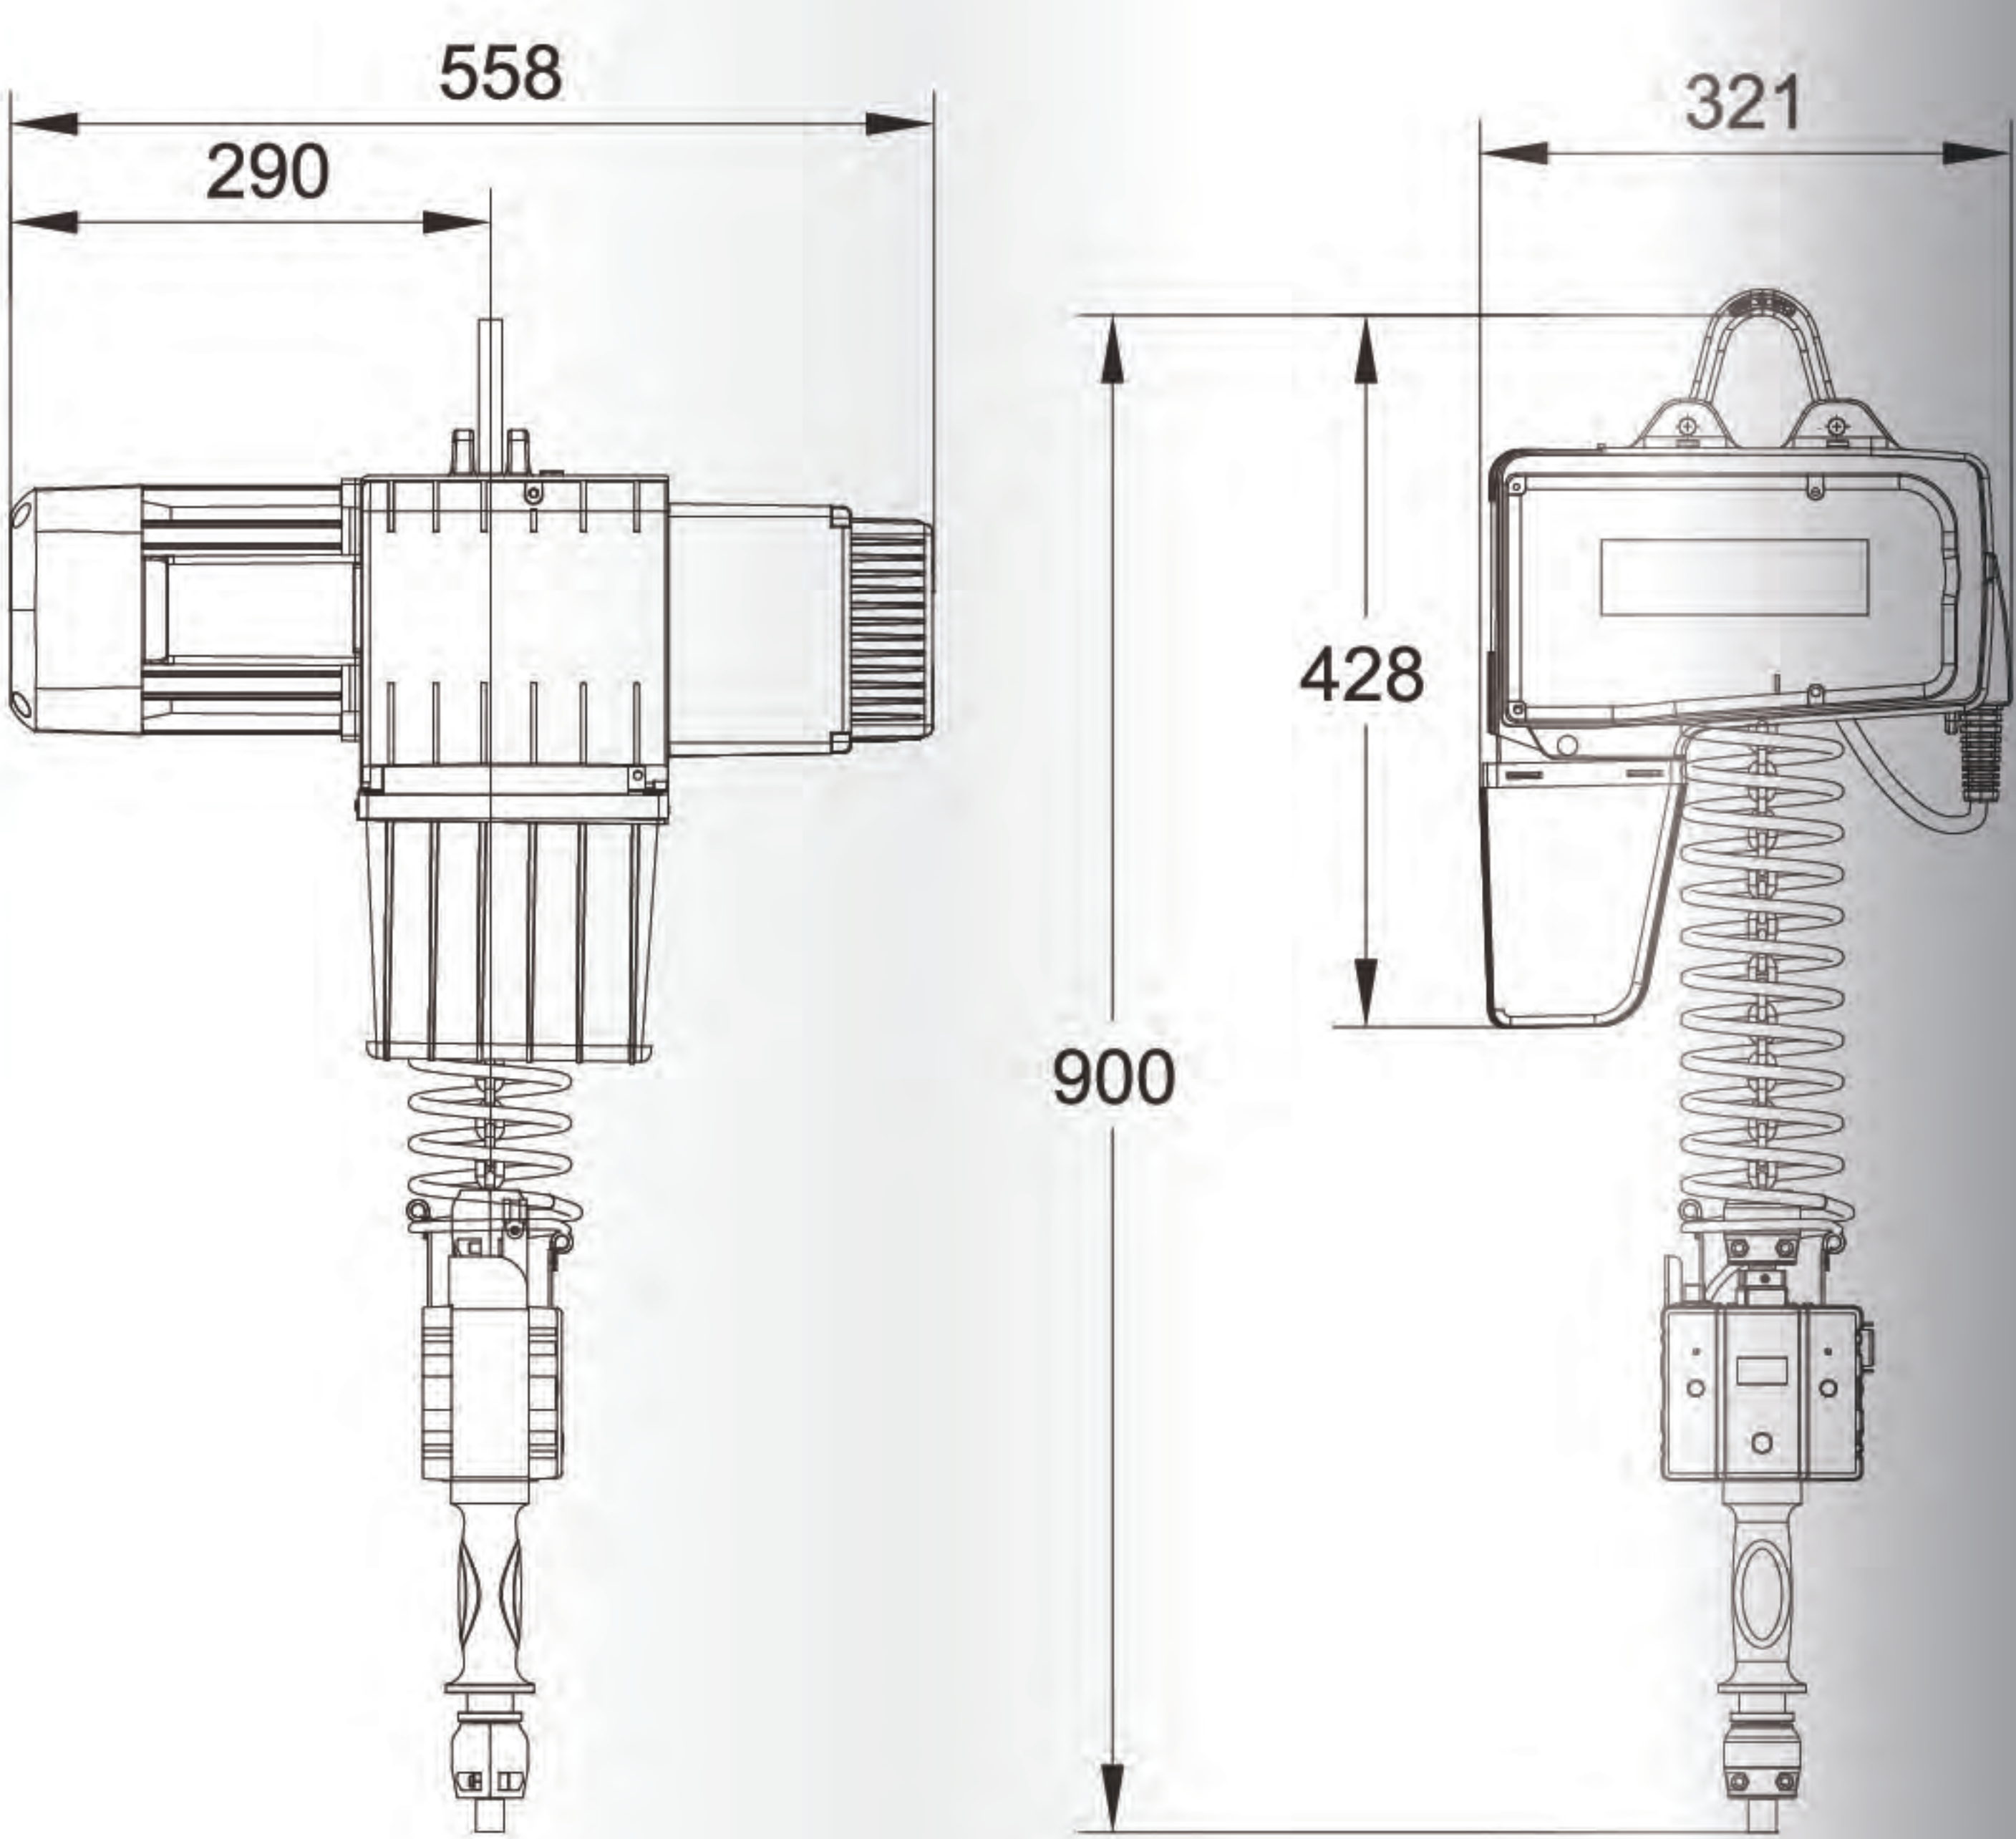


产品参数

型号	单位	SX-ZNL80	SX-ZNL125	SX-ZNL250	SX-ZNL500
起重量	kg	80	125	250	500
最大起升速度	m/min	20	20	16	8
标准起升高度	mm	3000	3000	3000	3000
链条规格	mm	5.3*15.5	5.3*15.5	5.3*15.5	5.3*15.5
工作级别	FEM/ISO	4m/M7	4m/M7	4m/M7	4m/M7
电源电压	V AC	单相220	单相220	单相220	单相220
频率	HZ	50	50	50	50
控制电压	V DC	24	24	24	24
功率	KW	1.1	1.1	1.1	1.1
防护等级		IP55	IP55	IP55	IP55
绝缘等级		F	F	F	F
工作温度范围	℃	-20至40	-20至40	-20至40	-20至40

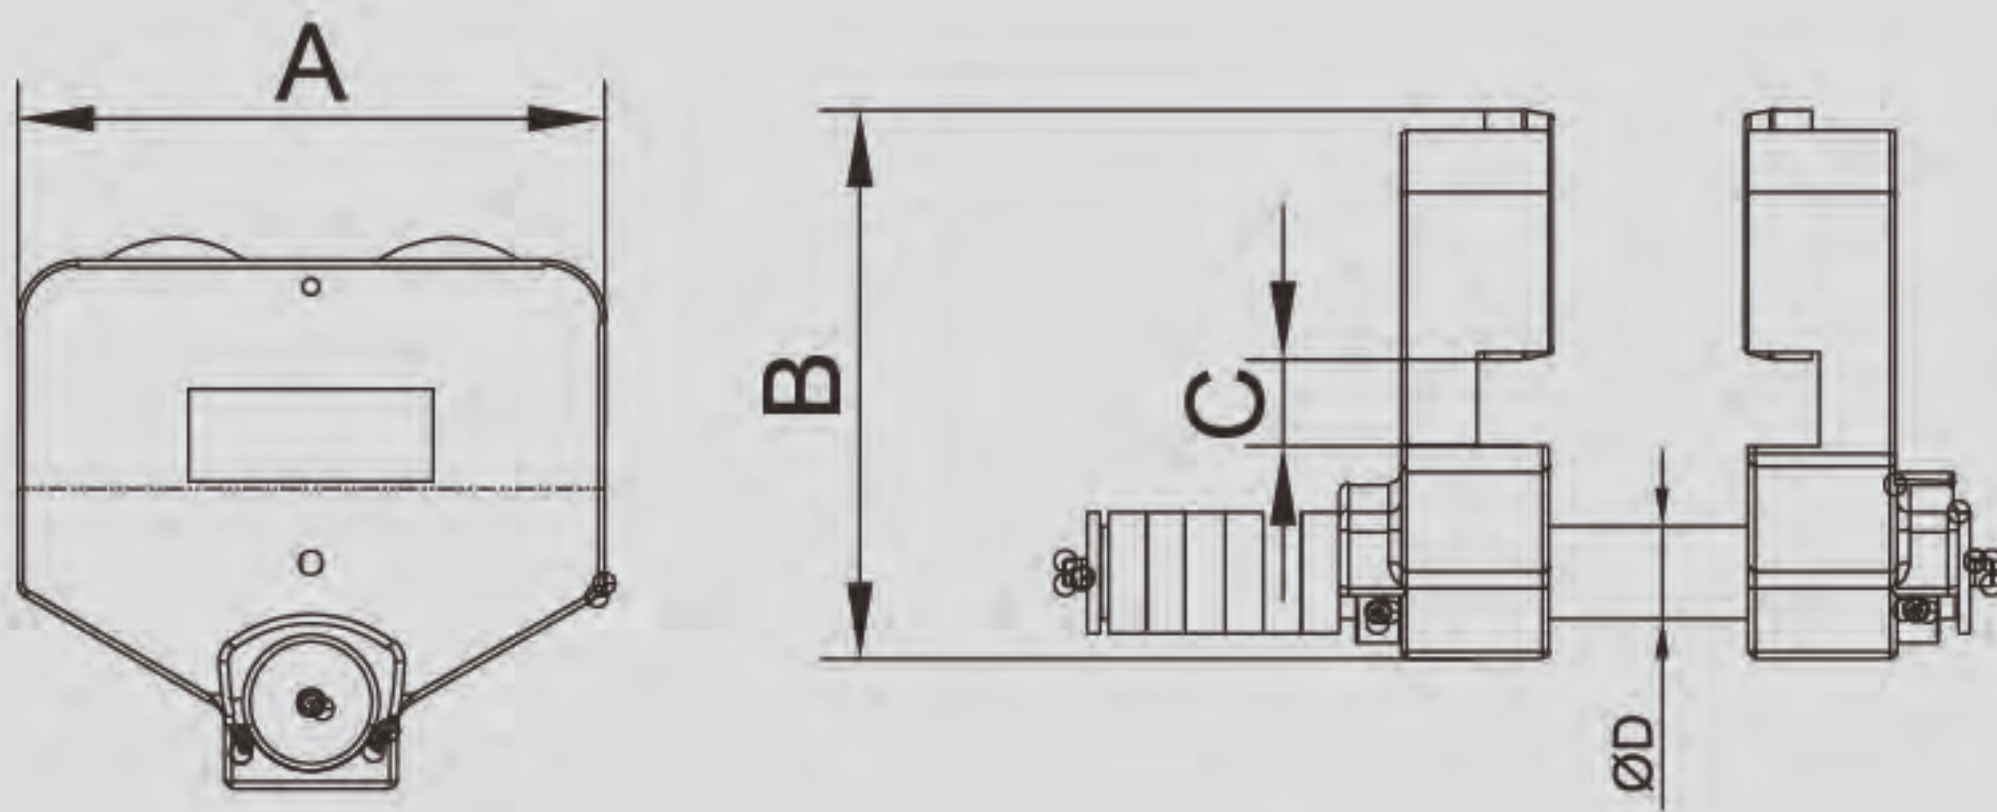

型号 Model	载重量 (KG)	A	B	C	D	I-Beam 工字钢梁
MT-0.5	500	192	179	29	30	80-200
MT-01	1000	400	291	55	31	80-200
MT-02	2000	400	291	47	36	80-200

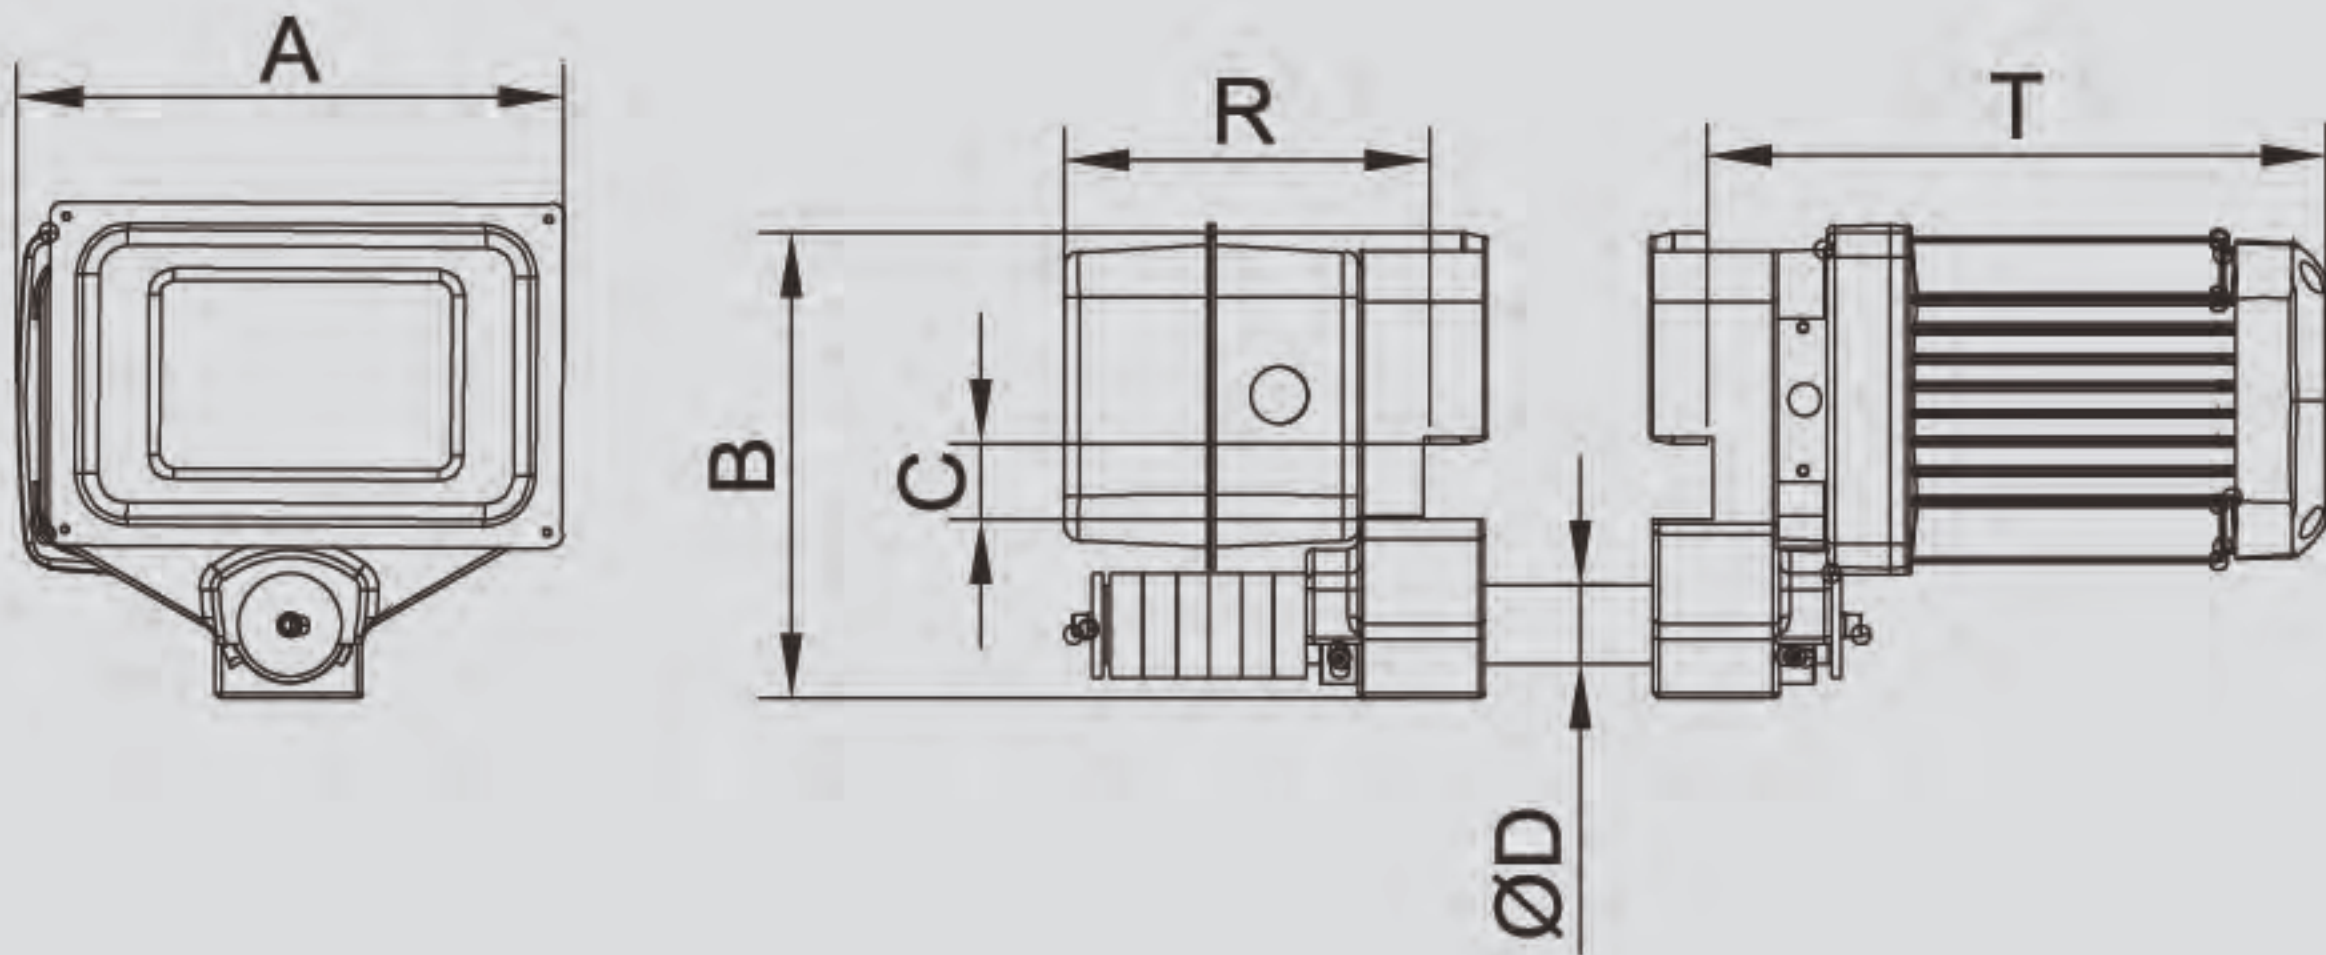

型号 Model	载重量 (KG)	A	B	C	D	T	R	运行速度 m/min	马达 (KW)	I-Beam 工字钢梁
ET-0.5	500	210	179	29	30	280	175	快速18 m/min 快速12 m/min 或5-20 m/min	04	80-200
ET-01	1000	335	291	55	31	285	175		04	80-200
ET-02	2000	385	291	47	36	285	175		0.55	80-200